



Installation instructions

Akrapovič Exhaust System:

Slip-On

for the

Harley-Davidson

models:

DYNA (staggered mounted mufflers models)



503373

Congratulations on purchasing an Akrapovič exhaust system. Please read the entire installation manual prior to undertaking any activities related to installation of your new Akrapovič exhaust system. In case you do not fully understand the manual or any of its parts, please contact your authorized dealer!

This product should be installed by someone with sufficient knowledge of exhaust systems and their installation, and appropriate hand or power tools. If you are not qualified for this work, please utilize a certified mechanic for installation. By installing Your Akrapovič exhaust system, you indicate that you have read the installation manual in its entirety and you agree with the terms stated herein.

It is your responsibility to follow all installation instruction guidelines supplied with the Akrapovič exhaust system and undertake all necessary safety precautions. Akrapovič d.d. assumes no responsibility for damages occurring from misuse, abuse, improper installation, improper operation, lack of responsible care, or all previously stated reasons resulting from incompatibility with other manufacturer's products and/or systems.

IMPORTANT INFORMATION

Exclusion of Certain Liability

1. The manufacturer, importer or dealer shall not be liable for any incidental damage including personal injury or any other damages caused by improper installation or operation of the Akrapovič exhaust system. When installing the Akrapovič exhaust system be careful that the exhaust system does not touch other parts sensitive to high temperature.
2. Akrapovič makes no representation or warranties with regard to damage caused by the improper installation, use and maintenance of the Akrapovič exhaust system. The warranty is limited to defects recognized by our technical department and due to normal use, and excludes items subject to normal wear (gaskets and damping wool). The guarantee is void in case of accident, modification, improper or competition use.
3. Do not attempt to install the Akrapovič exhaust system on a vehicle model for which it was not made or tested by Akrapovič.
4. When the exhaust system gets very hot during operation, be careful not to burn yourself on the exhaust system or parts which are in direct contact with it, even when the engine is not running. Also protect other people, especially children, from the injuries mentioned above.
5. In some cases Akrapovič exhaust system kits contain chemical products (ceramic anti-seizing grease; bolt sealant). Handle with care, do not inhale or swallow. Avoid excessive contact with skin, eyes or mucous membranes. Keep out of reach of children.
6. Technical specifications of Akrapovič exhaust systems and related products are subject to change without notice.
7. Before removing the original exhaust system from your vehicle, please compare the parts you received with the list of materials provided in the installation manual in order to assure that you have all the parts necessary for the installation of your new Akrapovič exhaust system.
8. Although this manual consists of instructions for installation in written form, as well as photographs and pictures representing individual steps of the installation, please note that the photographs and pictures are symbolic and are intended for representation of general overview only. The photographs and pictures contained herein should serve as a guideline only and actual installation of the exhaust system may not correspond with the photographs and pictures entirely.
9. The process of uninstalling the original exhaust system may vary depending on the existing exhaust system. Please follow the original exhaust system manufacturer's instructions for uninstalling the original exhaust system.

Trademarks

The Akrapovič Exhaust System Technology logo is a registered trademark of Akrapovič d.d.

Akrapovič website

Information about Akrapovič exhaust systems and related products is available on the Akrapovič website at: <http://www.akrapovic.com/>

Copyright

No part of the Akrapovič exhaust system or its documentation may be reproduced or distributed in any form or by any means without the prior written authorization of the Akrapovič company.

© Akrapovič, d.d. All rights reserved.

Symbols

The following symbols are used throughout these installation instructions:



TOOLS REQUIRED



TIGHTENING TORQUE



INSTALLATION TIP



CAUTION OR WARNING




USE BOLT SEALANT; Apply 3 to 4 small drops of bolt sealant onto the cleaned and degreased threads before tightening the bolts. **WARNING! Avoid contact with skin, eyes and mucous membranes. Do not inhale fumes. Keep out of reach of children.**



USE ANTI-SEIZE LEAD-FREE COPPER PASTE (black tube); Provides trouble-free and long-lasting protection against seizing, corrosion and rusting of bolts, threaded ends, nuts, joints, etc. Also protects against vibration, wear and impact. **WARNING! Avoid eye contact. Avoid excessive skin contact. Keep out of reach of children.**



USE ANTI-SEIZING GREASE (white tube); Prevents seizing, corrosion and excessive wear between the titanium components of your exhaust system. **WARNING! Avoid eye contact. Avoid excessive skin contact. Keep out of reach of children.**

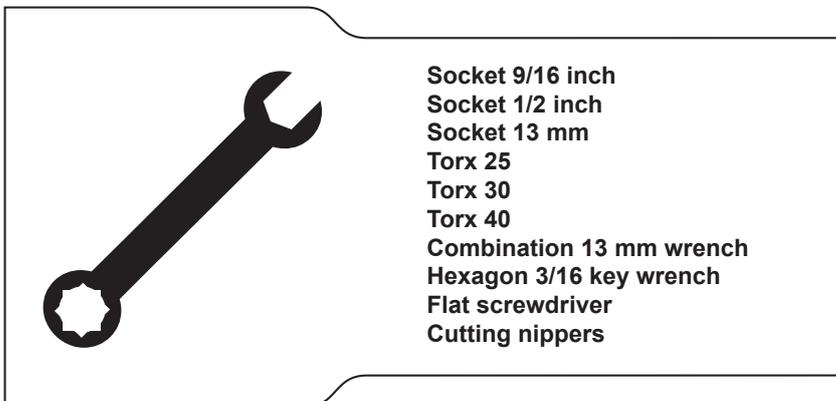

BEFORE INSTALLING, CHECK SCHEMATIC OF THE EXHAUST SYSTEM!



IF ANY ITEMS IN THE AKRAPOVIČ EXHAUST SYSTEM PACKAGE ARE MISSING, PLEASE CONTACT YOUR AUTHORIZED DEALER. KEEP THE SCHEMATIC FOR FUTURE REFERENCE.



THESE INSTALLATION INSTRUCTIONS MUST BE READ CAREFULLY IN ORDER TO ENSURE PROPER INSTALLATION AND OPERATION OF THE AKRAPOVIČ EXHAUST SYSTEM.



THE EXHAUST SYSTEM CAN BE EXTREMELY HOT. ALLOW THE EXHAUST AND ENGINE TO COOL DOWN BEFORE BEGINNING INSTALLATION.



WE ADVISE YOU TO LEAVE INSTALLATION TO A QUALIFIED SERVICEMAN. IMPROPER INSTALLATION MAY RESULT IN A SHORTER LIFETIME OF THE EXHAUST SYSTEM AND/OR DAMAGE TO THE VEHICLE.



THIS MANUAL IS SPECIFIC TO THE HARLEY DAVIDSON DYNA SUPER GLIDE CUSTOM 2010. THERE MAY BE SOME DIFFERENCES IN INSTALLATION PROCEDURES FOR OTHER DYNA MODELS WITH STAGGERED MOUNTED MUFFLERS.



AKRAPOVIČ MAKES EVERY EFFORT TO PROVIDE IMPROVED CORNERING CLEARANCE FOR EXHAUST SYSTEMS. HOWEVER, DUE TO DESIGN AND SPACE LIMITATIONS ON SOME MOTORCYCLE MODELS, GROUND AND CORNERING CLEARANCE MAY NOT IMPROVE OR MAY EVEN BE REDUCED. FOR ADVANCED USERS, WE RECOMMEND INCREASING THE SPRING PRELOAD SETTINGS TO IMPROVE GROUND CLEARANCE.



THE AKRAPOVIČ WARRANTY DOES NOT COVER DISCOLORATION OF ANY CHROME PRODUCTS.

REMOVAL OF ORIGINAL EXHAUST SYSTEM:

1. Put the motorcycle on a side stand, we recommend a center stand.
2. Unscrew the marked mufflers' bracket bolt and loosen the muffler-header connection clamps (Figure 1, 2).

! WARNING: make sure, not to damage any part of the motorcycle during this procedure!

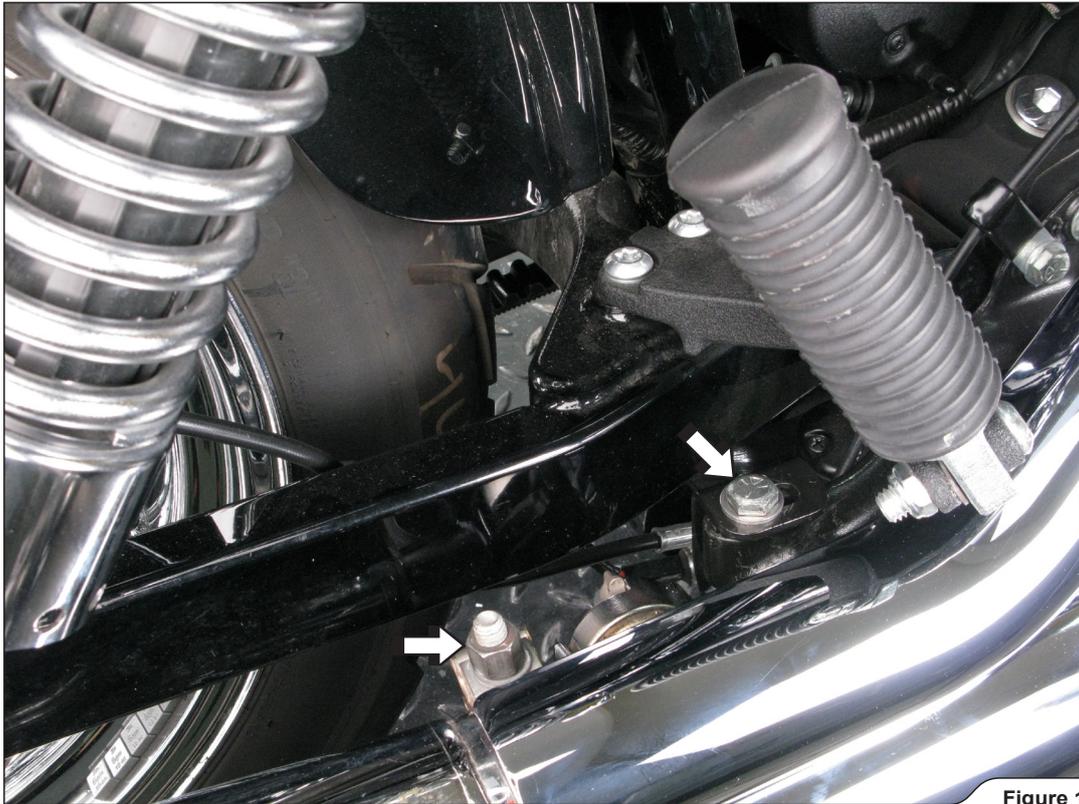


Figure 1

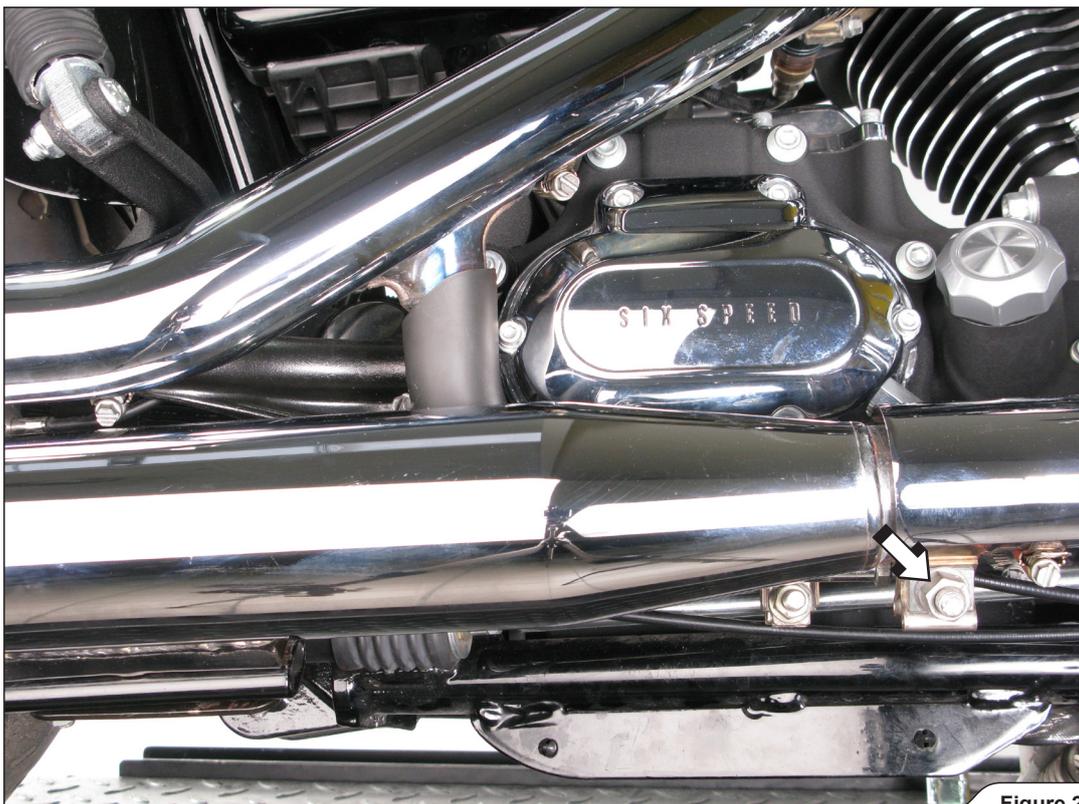


Figure 2

3. Unscrew four marked nuts and carefully remove both mufflers and mufflers' bracket off the motorcycle (Figure 3).
! WARNING: make sure, not to damage any part of the motorcycle during this procedure!



Figure 3

4. Unscrew three marked tape clamps, carefully remove rear header's heat shield and loosen headers' connection clamp (Figure 4).
! WARNING: make sure, not to damage any part of the motorcycle during this procedure!

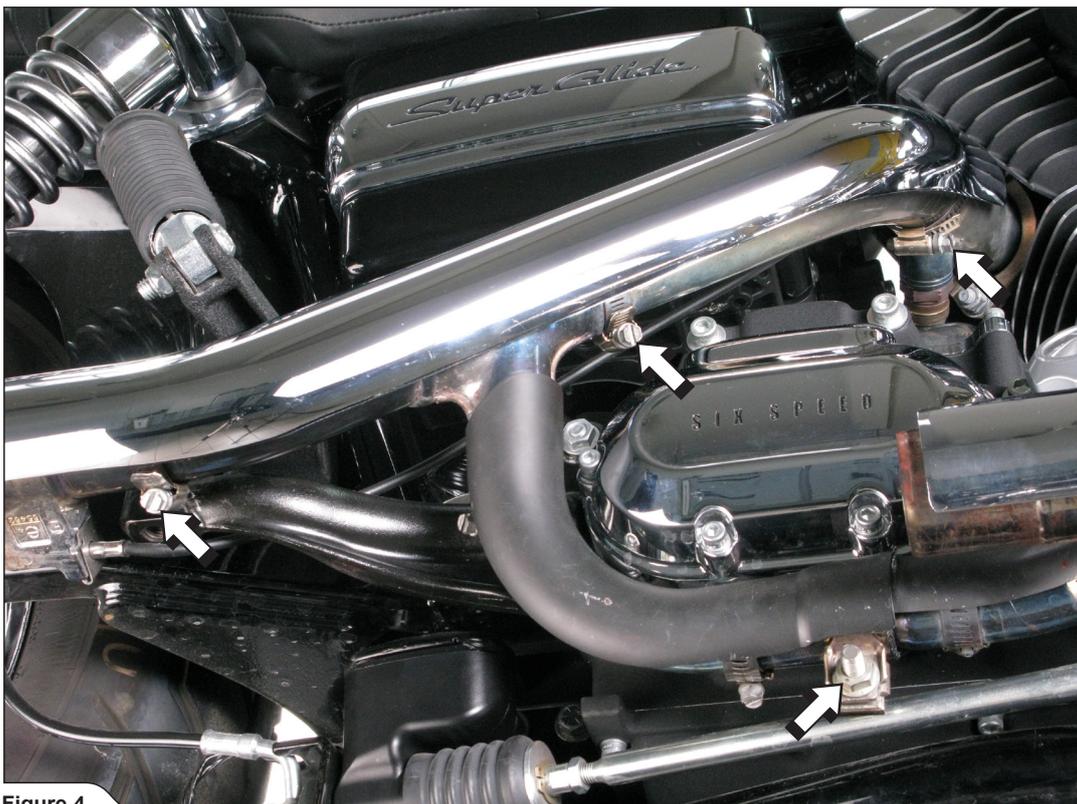


Figure 4

5. Loosen the rear header's flange nuts, so the position of the header is possible to adjust later on (Figure 5).
! WARNING: make sure, not to damage any part of the motorcycle during this procedure!

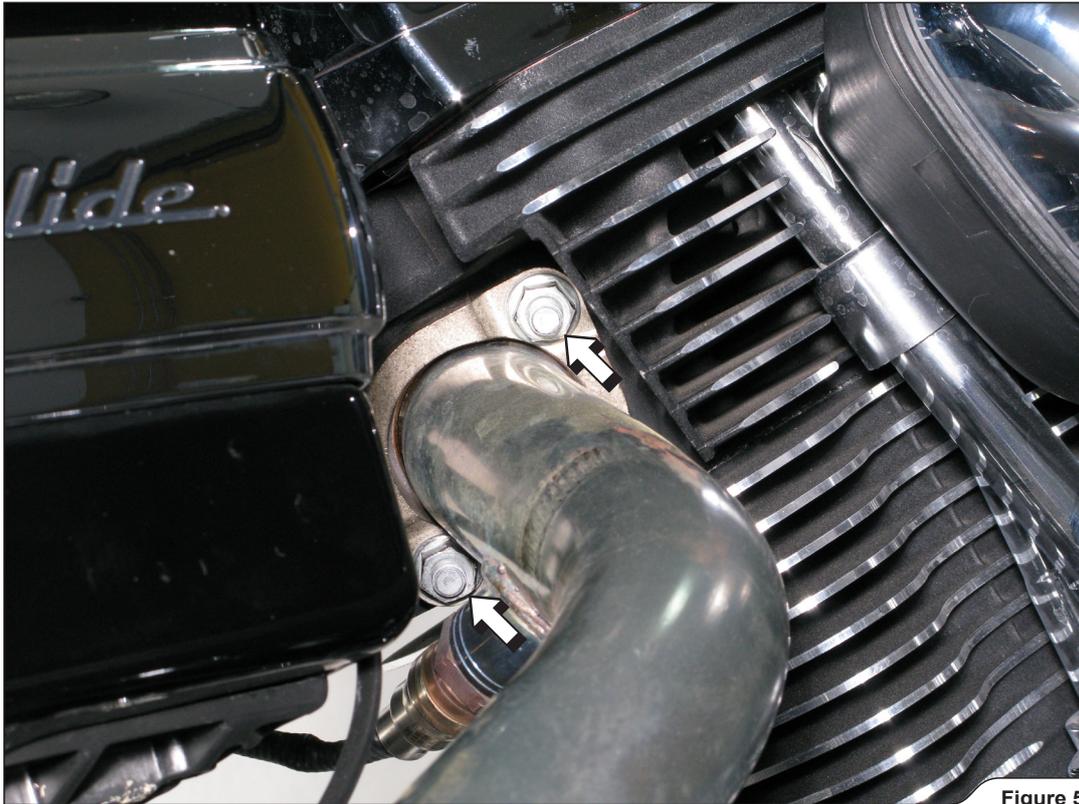


Figure 5

INSTALLATION OF THE AKRAPOVIČ EXHAUST SYSTEM:

1. Correctly assemble the mufflers, catalytic converters, link pipes, clamps and heat shields (Figure 6, 7).
! WARNING: use anti-seize copper paste on all clamps' bolt threads!
! CAUTION: assemble the bottom muffler with eccentric link pipe and top muffler with centric one!
! CAUTION: the heat shields are not symmetrical (BOTTOM shield is marked with No.2)!



Figure 6

- ! **WARNING:** make sure, that link pipes and mufflers are joint all the way – use rubber mallet if necessary to tap the connections into place!
- ! **WARNING:** loosely tighten all clamps only! You'll need to rotate the bottom link pipe later.



Figure 7

2. Loosely attach the Akrapovič mufflers' bracket onto the motorcycle, using original bolt and washer (**Figure 8**).
- ! **WARNING:** make sure, not to damage any part of the motorcycle or mufflers' bracket during this procedure!



Figure 8

- Slide the assembled mufflers onto the original headers; rotate the bottom eccentric link pipe, till maximum ground clearance is achieved, align the mufflers and tighten them onto the bracket (Figure 9).

! **CAUTION:** use bolts and washers from Akrapovič installation kit!

! **WARNING:** make sure, not to damage or scratch the mufflers, swing arm or any other part of the motorcycle!

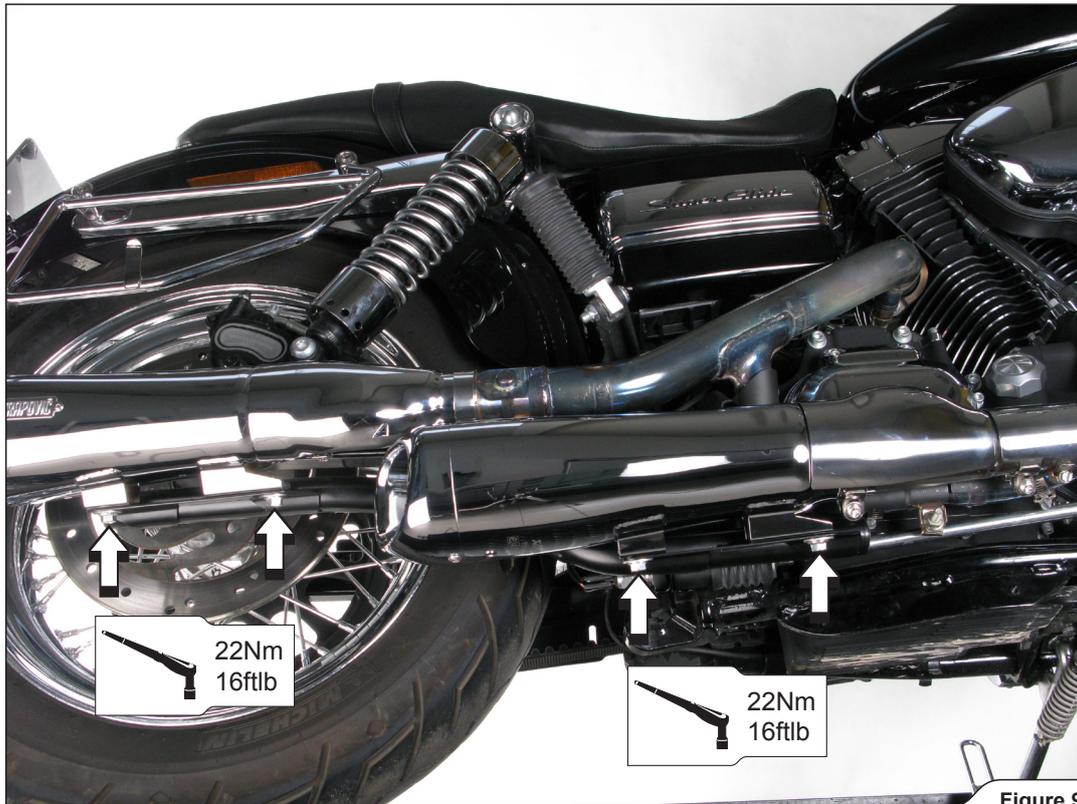


Figure 9

- Tighten the mufflers' bracket to the specified torque (Figure 10).

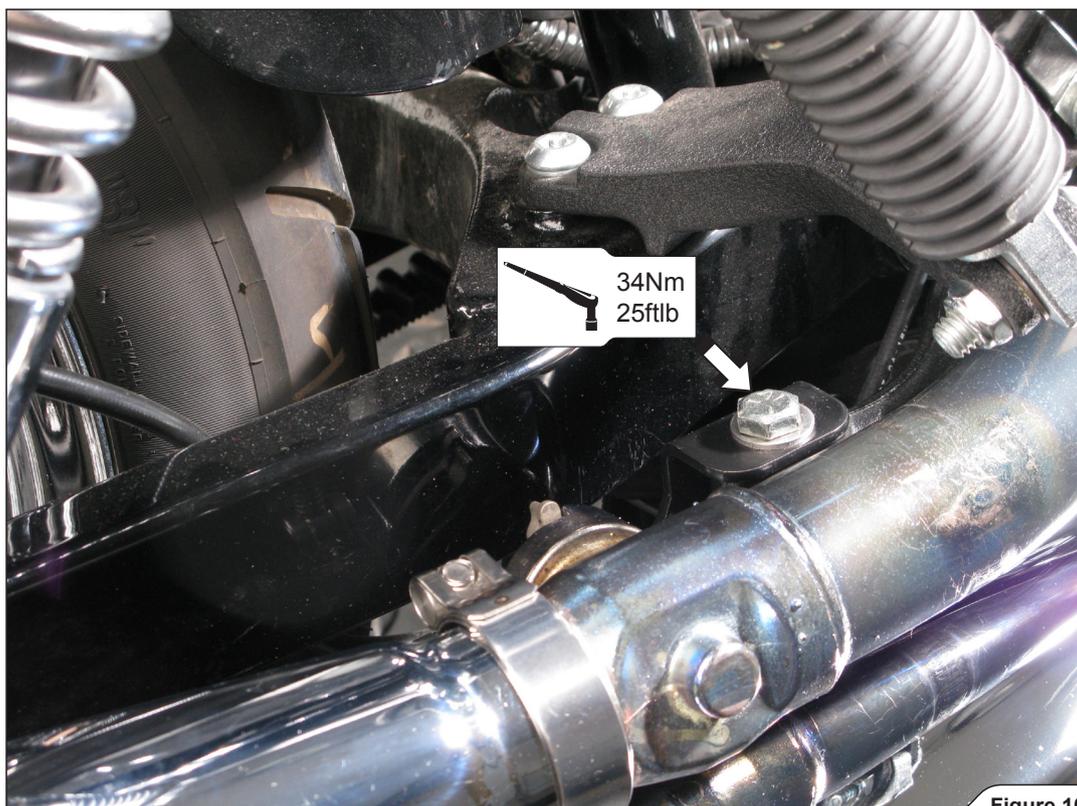


Figure 10

5. Tighten the rear header's flange to the specified torque (**Figure 11**).
! **WARNING:** make sure, not to damage any part of the motorcycle during this procedure!

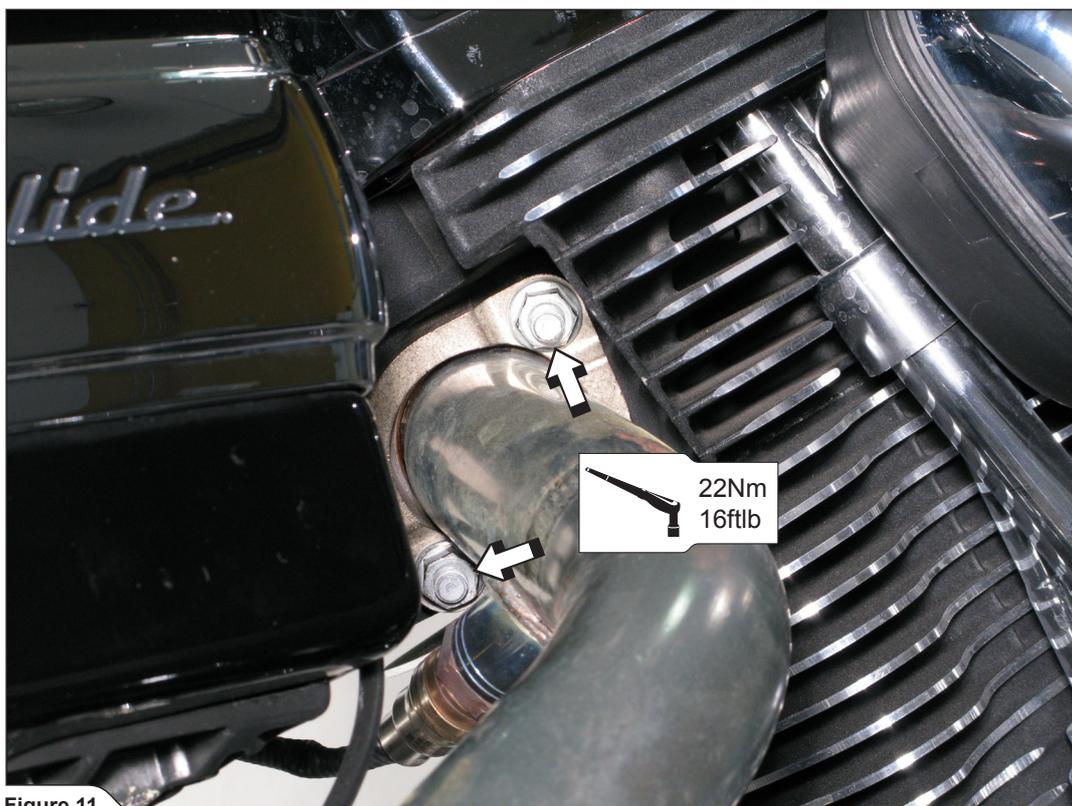


Figure 11

6. Change the bottom original heat shield's tape with the one from Akrapovič installation kit (**Figure 12**).
! **WARNING:** orient the tape clamp as shown!



Figure 12

- Carefully assemble the original heat shield back onto the header, align it and tighten tape clamps to the specified torque (Figure 13, 14).

! **WARNING:** make sure, not to damage any part of the motorcycle during this procedure!

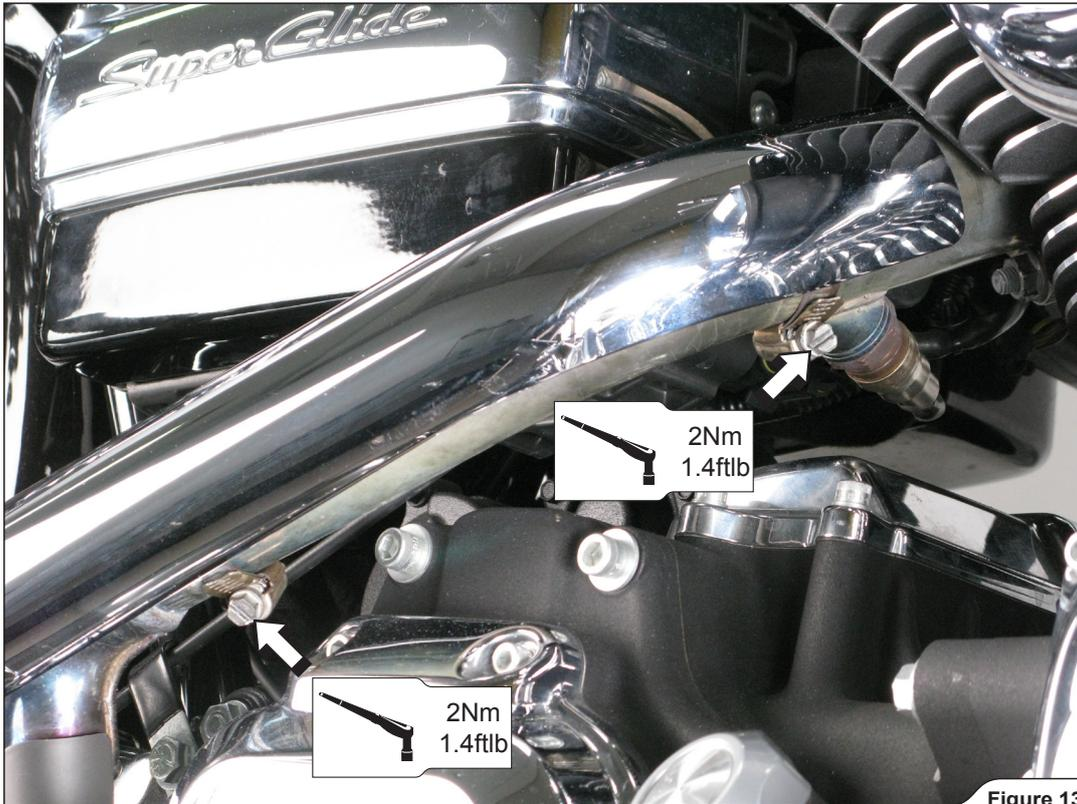


Figure 13

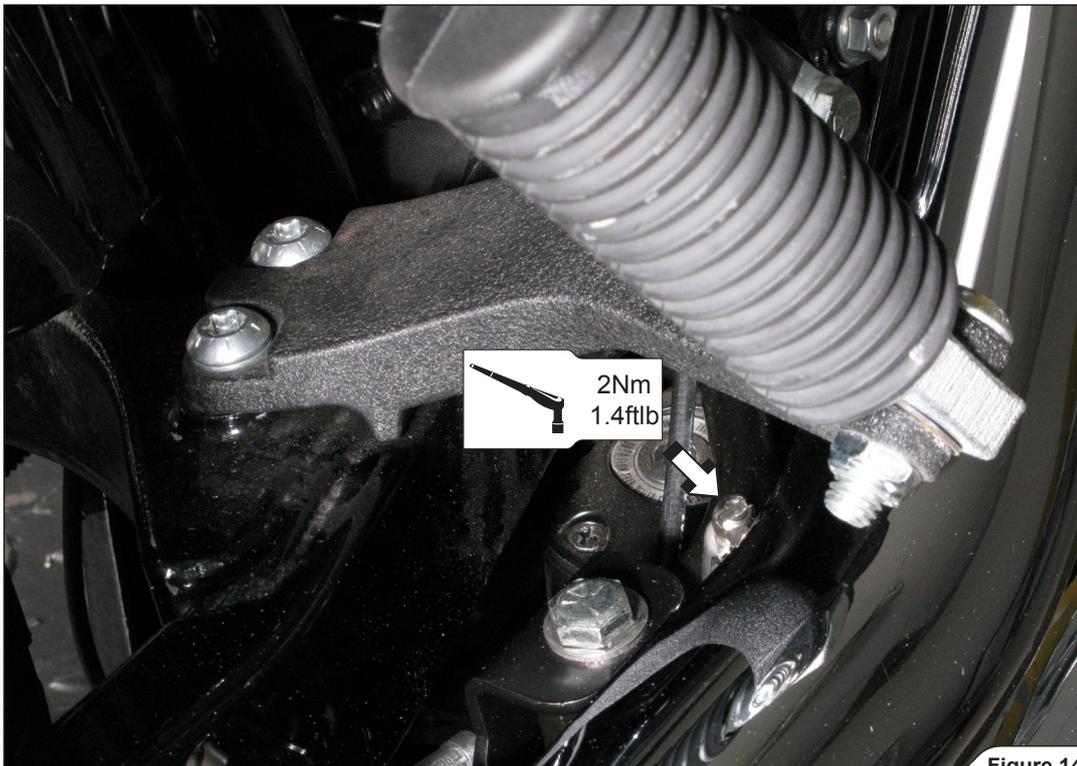


Figure 14

8. Align both link pipes' heat shields in respect to the mufflers and original heat shields and tighten all marked clamps to the specified torque (**Figure 15, 16**).

! WARNING: make sure, not to damage any part of the exhaust system or motorcycle during this procedure!

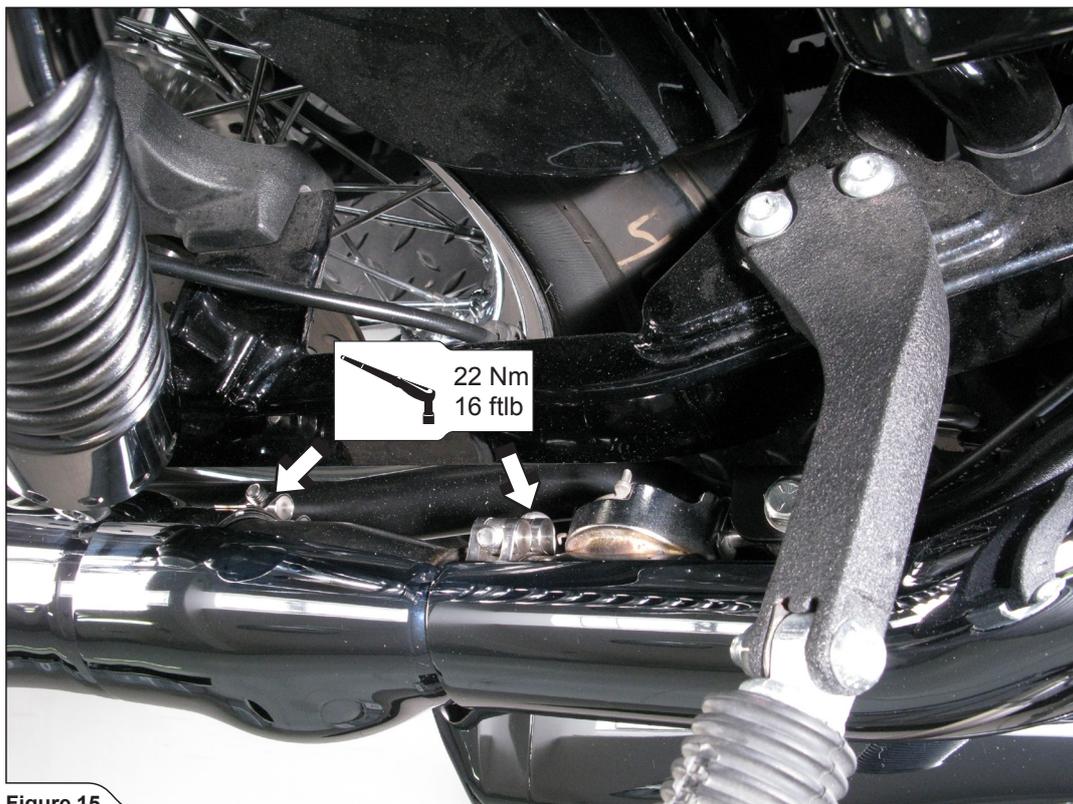


Figure 15

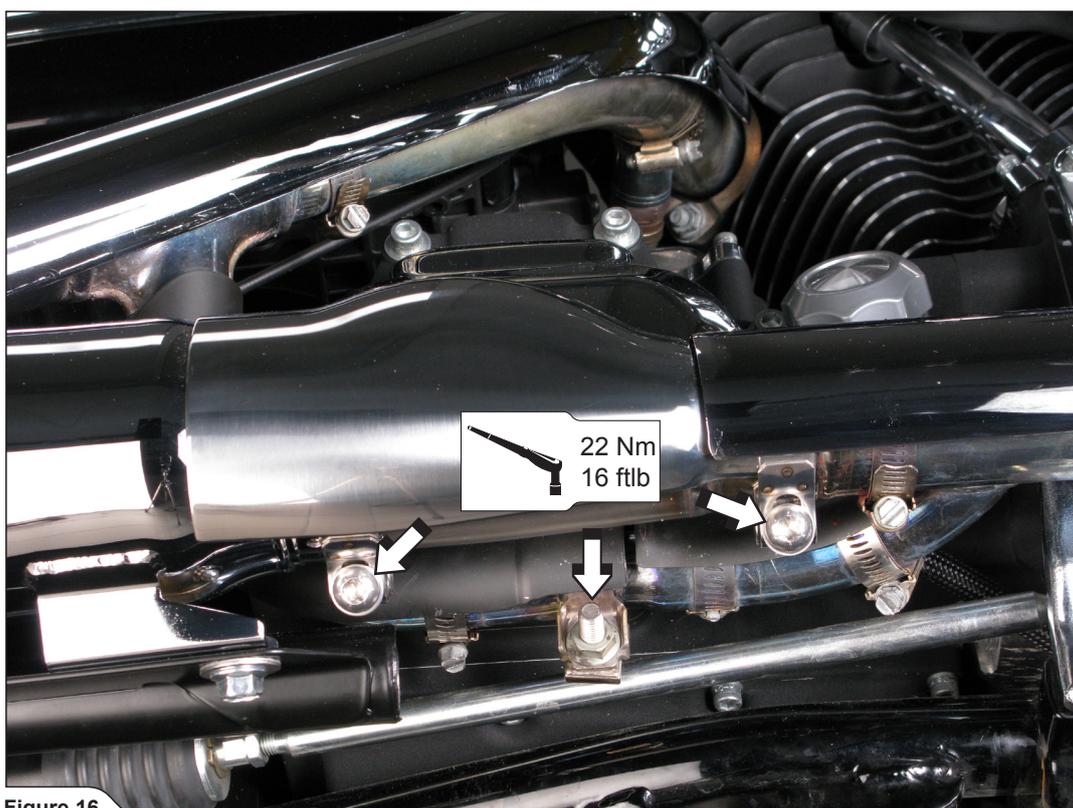


Figure 16

INSTALLATION OF OPTIONAL AKRAPOVIČ SADDLE BAGS LIFT KIT:

1. Unscrew both original saddle bags off the motorcycle (Figure 17).

! WARNING: make sure, not to damage any part of the motorcycle during this procedure!



Figure 17

2. Assemble the Akrapovič brackets onto the motorcycle, using original distance bushes and bolts and washers from Akrapovič installation kit (Figure 18, 19).

! WARNING: make sure, not to damage any part of the motorcycle during this procedure!

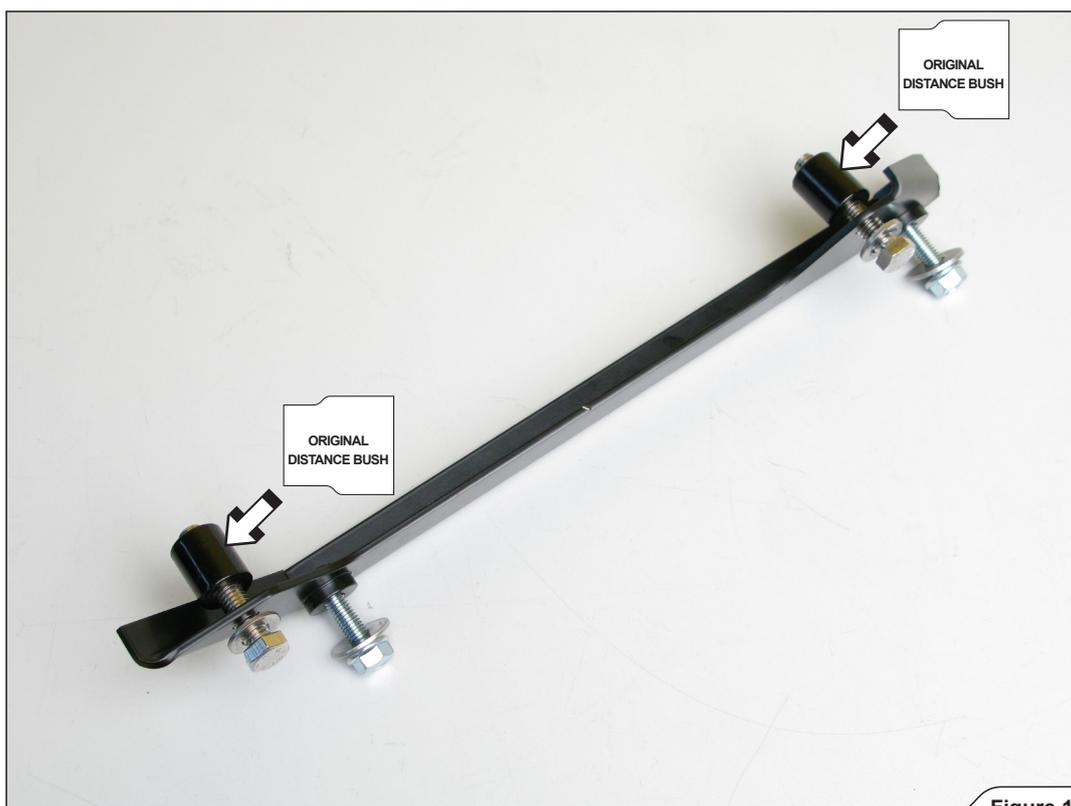


Figure 18

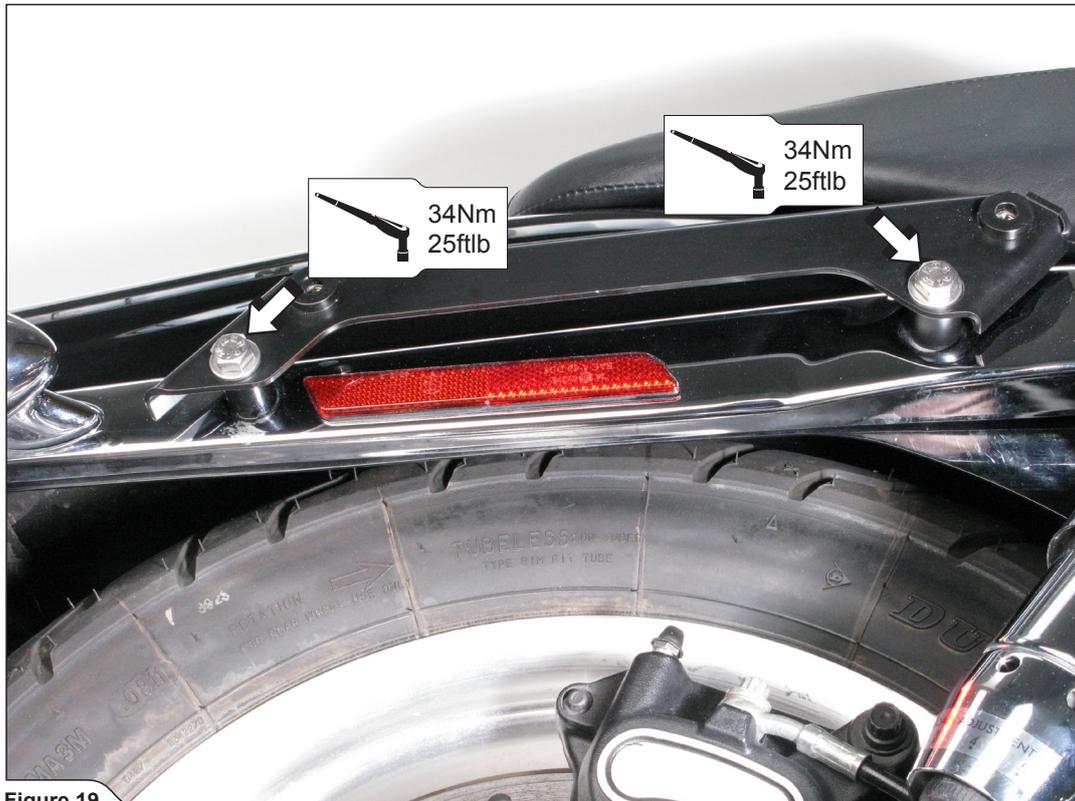


Figure 19

3. Screw both original saddle bags onto the Akrapovič brackets, using M8x30 bolts and washers from Akrapovic installation kit (Figure 20).

! **WARNING:** make sure, not to damage any part of the motorcycle during this procedure!



Figure 20

Final installation:

Thoroughly clean all grease spots on headers, link pipes, heat shields and mufflers; use a soft cloth sprayed with a contact cleaner (brake cleaner), then wipe with a soft dry cloth.

Cleaning will prevent spots from burning onto the surface. Do not use aggressive chemical cleaners, because they can damage the logo/sticker.

! WARNING: make sure all the bolts are sufficiently tightened. In case the exhaust system touches the cowling or other parts repeat the adjustment of the exhaust system or contact your authorized dealer.

! WARNING: check vehicle manufacturer manual for tightening torques (for dismantled stock parts)!

! IT IS NORMAL IF WHITE SMOKE COMES OUT OF THE MUFFLER ON FIRST OPERATION.


! DO NOT STAND BEHIND THE MUFFLER ON FIRST OPERATION.

! DO NOT USE AUTOMOTIVE WHEEL CLEANERS OR ANY CLEANING PRODUCTS WHICH CONTAIN ACIDIC ADDITIVES TO CLEAN AKRAPOVIČ EXHAUST SYSTEMS.

MAINTENANCE OF THE AKRAPOVIČ EXHAUST SYSTEM:

1. Clean the titanium exhaust components with a multi-purpose spray lubricant (WD-40 or equivalent), carbon fiber exhaust components with soft and dry cloth and stainless steel, mortemp powder coated or chrome plated components with soft cloth sprayed with contact cleaner, then wipe with soft and dry cloth. A change in the color of the exhaust system is normal due to the high temperatures.
2. Periodically make sure all the bolts and springs are sufficiently tight.

Schematic

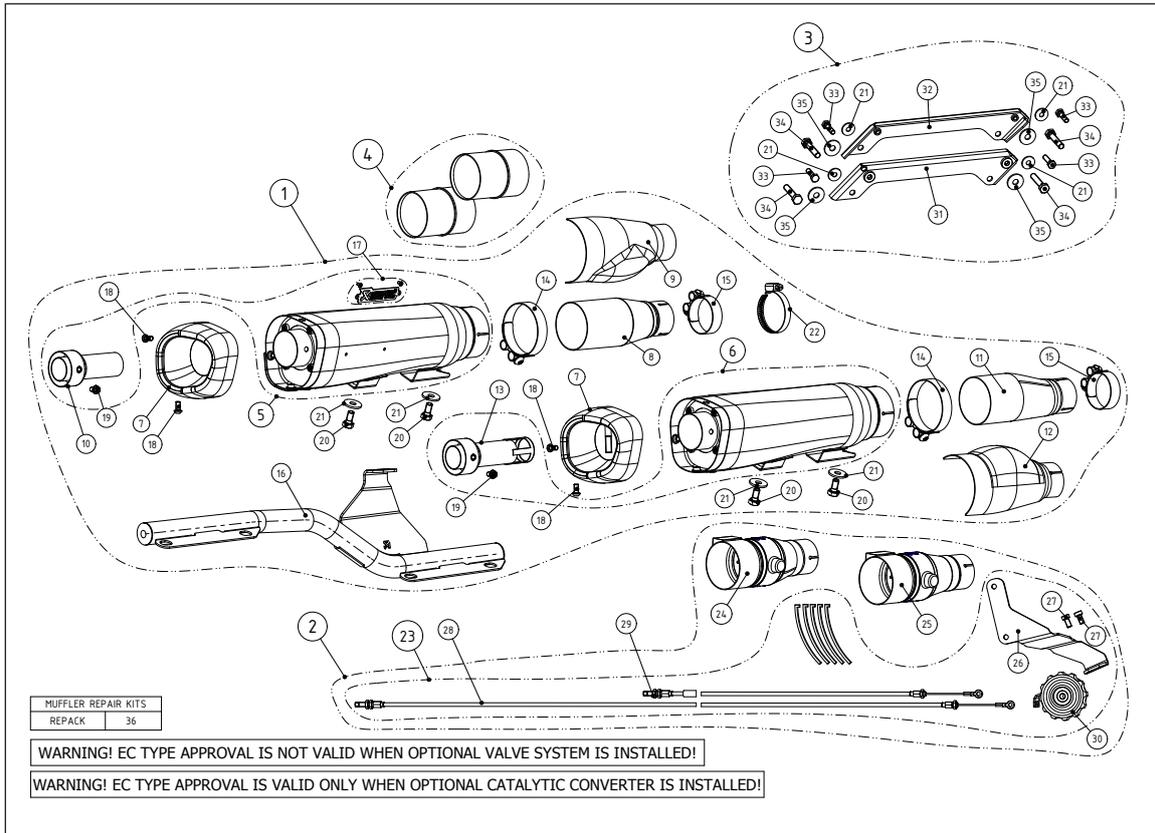

Spare parts table

No.	SALES CODE	DESCRIPTION	QTY.
1	S-HDDYSO2-HC	Slip on	1
2	P-HDV3	Valve system - optional	1
3	P-HF624	Saddle bag bracket set - optional	1
4	P-KAT-029	Catalytic converter - optional	1
5	M-HCBG00201SSRC	Muffler - rear chrome	1
6	M-HCBG00101SSFC	Muffler - front chrome	1
7	V-EC157	End cap - chrome	2
8	LP-HDST1	Link pipe	1
9	P-HSHD11RC	Heat shield - rear chrome	1
10	V-TUV115	Noise reduction insert	1
11	LP-HDDY1	Link pipe	1
12	P-HSHD11FC	Heat shield - front chrome	1
13	V-TUV116	Noise reduction insert	1
14	P-R56	Fitting ring	2
15	P-R59	Fitting ring	2
16	P-X97	Bracket	1
17	P-HF584	Fitting set - chrome logo	1
18	P-FB33	Screw - torx	4
19	P-FB40	Screw	2
20	P-FB41	Screw	4
21	P-DR4	Distance ring	6
22	P-R30	Fitting ring	1
23	P-HF643	Valve system fitting set	1
24	LP-HDST2	Link pipe	1
25	LP-HDDY4	Link pipe	1
26	P-X76	Bracket	1
27	P-FB31	Screw	2
28	P-HF631	Cable wire - long	1

No.	SALES CODE	DESCRIPTION	QTY.
29	P-HF644	Cable wire - short	1
30	P-HF639	Valve	1
31	P-X87	Bracket	1
32	P-X88	Bracket	1
33	P-FB18	Screw	4
34	P-FB53	Screw	4
35	P-DR41	Distance ring	4
36	P-RPCK64	Muffler repack kit	1

