



AKRAPOVIC RACING & EVOLUTION EXHAUST SYSTEM
for the
YAMAHA YZ 450F&WR450F

Congratulations on purchasing an Akrapovic exhaust system. Please read these installation instructions carefully. If you have any trouble installing the system please contact your authorized dealer!

IMPORTANT INFORMATION

Exclusion of Certain Liability

1. The manufacturer, importer or dealer shall not be liable for any incidental damage including personal injury or any other damages caused by improper installation or operation of the Akrapovic exhaust system. When installing the Akrapovic exhaust system be careful that the exhaust system does not touch other parts sensitive to high temperature.
2. Akrapovic makes no representation or warranties with regard to damage caused by the improper installation, use and maintenance of the Akrapovic exhaust system. The warranty is limited to defects recognized by our technical department and to normal use, and excludes items subject to normal wear (gaskets and damping wool). The guarantee is void in case of accident, modification, improper or competition use.
3. Do not attempt to install the Akrapovic exhaust system on a motorcycle for which it was not made or tested by Akrapovic.
4. When the exhaust system gets very hot during operation, be careful not to burn yourself on the exhaust system or parts which are in direct contact with it, even when the motor is not running. Also protect other people, especially children, from the injuries mentioned above.
5. In some cases Akrapovic exhaust system kits contain chemical products (ceramic anti-seizing grease; bolt sealant). Handle with care, do not inhale or swallow. Avoid excessive contact with skin, eyes or mucous membranes. Keep out of reach of children.
6. Technical specifications of Akrapovic exhaust systems and related products subject to change without notice.

Trademarks

The Akrapovic Exhaust System Technology logo is a registered trademark of Akrapovic d.d.

Akrpovic website

Information about Akrapovic exhaust systems and related products is available on the Akrapovic website at:
<http://www.akrapovic.com/>

Copyright

No part of the Akrapovic exhaust system or its documentation may be reproduced or distributed in any form or by any means without the prior written authorization of the Akrapovic company.

© Akrapovic d.d. All rights reserved.

Symbols

The following symbols are used throughout these installation instructions:



 **USE BOLT SEALANT;** Apply 3 to 4 small drops of bolt sealant onto the cleaned and degreased threads before tightening bolts. **WARNING! Avoid contact with skin, eyes and mucous membranes. Do not inhale fumes. Keep out of the reach of children.**

 **USE ANTI-SEIZING GREASE (white tube);** Prevents seizing, corrosion and excessive wear between the titanium components of your exhaust system. **WARNING! Avoid eye contact. Avoid excessive skin contact. Keep out of the reach of children.**

 **USE ANTI-SEIZE LEAD-FREE COPPER PASTE (black tube);** Provides trouble-free and long-lasting protection against seizing, corrosion and rusting of bolts, threaded ends, nuts, joints, etc. Also protects against vibration, wear and impact. **WARNING! Avoid eye contact. Avoid excessive skin contact. Keep out of the reach of children.**

INSTALLATION INSTRUCTIONS

 BEFORE INSTALLING CHECK SCHEMATIC OF THE EXHAUST SYSTEM!

 IF ANY ITEMS IN THE AKRAPOVIC EXHAUST SYSTEM PACKAGE ARE MISSING PLEASE CONTACT YOUR AUTHORIZED DEALER. KEEP THE SCHEMATIC FOR FUTURE REFERENCE.

 THESE INSTALLATION INSTRUCTIONS MUST BE READ CAREFULLY IN ORDER TO ENSURE PROPER INSTALLATION AND OPERATION OF THE AKRAPOVIC EXHAUST SYSTEM.

 THE EXHAUST SYSTEM CAN BE EXTREMELY HOT. ALLOW THE MOTORCYCLE TO COOL DOWN BEFORE BEGINNING INSTALLATION.

 WE ADVISE YOU TO LEAVE INSTALLATION TO A QUALIFIED SERVICEMAN. IMPROPER INSTALLATION MAY RESULT IN A SHORTER LIFETIME OF THE EXHAUST SYSTEM AND/OR DAMAGE TO THE MOTORCYCLE.



REMOVAL OF STOCK EXHAUST SYSTEM:

1. Put the motorcycle on a side stand, we recommend a racing stand.
2. For access to the muffler remove the rear right panel (Figure 1, 2).



Figure 1



Figure 2

3. Untighten the bolt from the metal clamp at the link pipe – header tube joint (Figure 3).



Figure 3

4. Unscrew and remove the bolt from the link pipe bracket. **(Figure 4).**

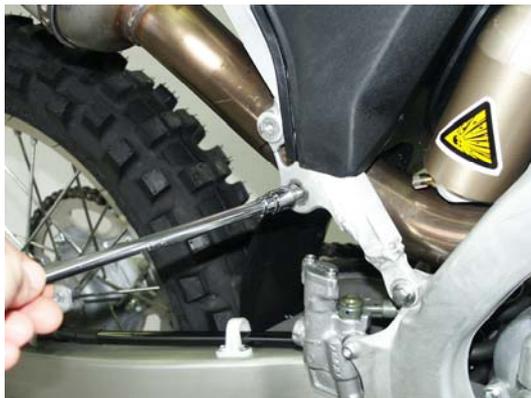


Figure 4

5. Unscrew and remove the bolt from the muffler bracket and remove the muffler together with the link pipe **(Figure 5, 6).**



Figure 5



Figure 6

6. Unscrew and remove the nut and bolt of the header tube flange. Remove the stock header tube **(Figure 7, 8).**



Figure 7



Figure 8

INSTALLATION OF THE AKRAPOVIČ EXHAUST SYSTEM:

Installing the header tube:

1. Set up the inner sleeve together with the flange and springs; make sure they are correctly oriented; use stock gasket; hand tighten the flange; (Figure 9, 10).



Figure 9



Figure 10

2. Install the header tube and attach the springs (Figure 11, 12). **WARNING!** make sure, that springs pull the header all the way into the sleeve – use rubber mallet if necessary to tap the connection into place!



Figure 11



Figure 12

3. Correctly position and install the optional Akrapovic carbon-fiber or stock heat shield onto the header tube; make sure the heat / distance washers are correctly installed (Figure 13, 14, 15).



Figure 13



Figure 14

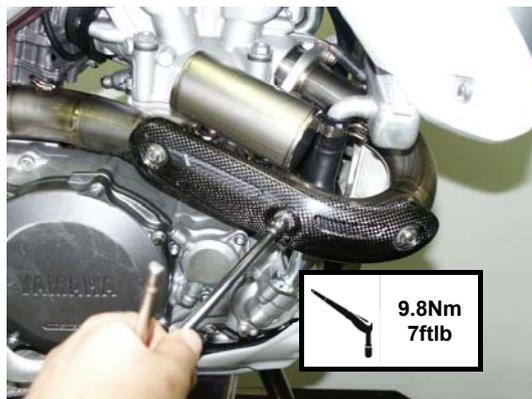


Figure 15

4. Correctly position the carbon-fiber clamp and slide it onto the muffler - bear in mind the left offset of the carbon-fiber clamp viewed from the rear. **WARNING: open the clamp slightly wider than the diameter of the outer sleeve of the muffler – do not scrape it along the muffler outer sleeve!** (Figure 16).



Figure 16

5. Correctly position the muffler with the link pipe and slide them onto the header tube (Figure 17). **For evolution exhaust only:** coat the interior side of the input of the titanium link pipe with Akrapovic ceramic anti-seizing grease (white tube).



Figure 17

- Hand tighten the bolt of the link pipe hanging bracket and attach the spring at the link pipe – header tube joint (**Figure 18, 19**). **WARNING: make sure, that spring pull the link pipe all the way onto the header– use rubber mallet if necessary to tap the connection into place!**



Figure 18



Figure 19

- Attach the carbon-fiber clamp to the stock chassis hanging bracket – use the Alu washers/spacers, rubber dampers supplied in the Akrapovic kit and stock bolt and washer. Do not fully tighten. Make sure the additional parts from the Akrapovic kit are correctly installed and the link pipe and header tube are not touching the engine or frame (**Figure 20, 21**).



Figure 20



Figure 21

- Tighten fully the bolts and nut of the muffler clamp, link pipe bracket and header tube flange (**Figure 22, 23, 24**).

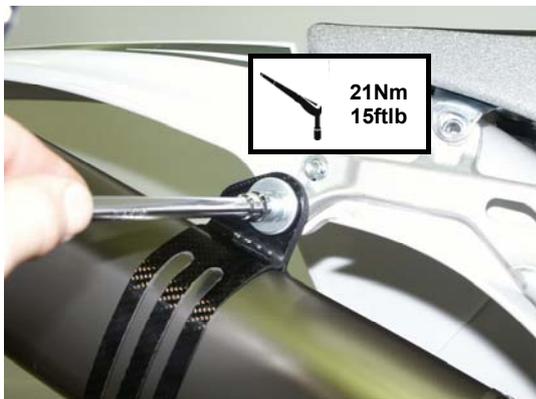


Figure 22



Figure 23

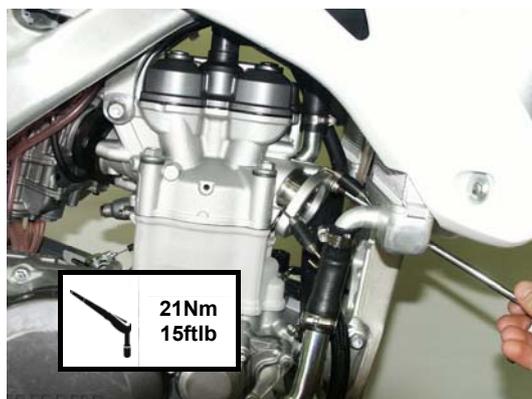


Figure 24

9. Reattach the rear panel (Figure 25).



Figure 25

Final installation:

1. Clean grease spots:
 - a. Muffler – titanium outer sleeve: use a soft cloth sprayed with a multi-purpose spray lubricant (WD-40 or equivalent).
 - b. Muffler – carbon-fiber outlet cap: use a soft dry cloth.
 - c. RACING - stainless steel link pipe, header tube: use a soft cloth sprayed with a contact cleaner, then wipe with a soft dry cloth.
 - d. EVOLUTION - titanium link pipe, header tube: use a soft cloth sprayed with a multi-purpose spray lubricant (WD-40 or equivalent).

Cleaning will prevent spots from burning onto the surface. Do not use aggressive chemical cleaners, because they can damage the sticker.

2. **WARNING: in case of installing optional carbon-fiber heat shield: after running engine for 30 minutes, tighten the bolts on the Akrapovic carbon-fiber heat shield!**

3. Position of the correctly installed Akrapovic **RACING** or **EVOLUTION** system (Figure 26, 27, 28, 29).



Figure 26



Figure 27



Figure 28



Figure 29

4. Check the operation of the brakes and suspension. Make sure all the bolts are sufficiently tightened. In case the exhaust system touches the cowling or other parts repeat the adjustment of the exhaust system or contact your authorized dealer.

! IT IS NORMAL IF WHITE SMOKE COMES OUT OF THE MUFFLER ON FIRST OPERATION.


! DO NOT STAND BEHIND THE MUFFLER ON FIRST OPERATION.

! DO NOT USE AUTOMOTIVE WHEEL CLEANERS OR ANY CLEANING PRODUCTS WHICH CONTAIN ACIDIC ADDITIVES TO CLEAN AKRAPOVIC EXHAUST SYSTEMS.

MAINTENANCE OF THE AKRAPOVIC EXHAUST SYSTEM:


1. Clean the titanium exhaust components with a multi-purpose spray lubricant (WD-40 or equivalent), carbon fiber exhaust components with soft and dry cloth and stainless steel components with soft cloth sprayed with contact cleaner, then wipe with soft and dry cloth. Do not use aggressive chemical cleaners, because they can damage the sticker. A change in the color of the exhaust system is normal due to the high temperatures.
2. The wearing out of the muffler silencing material depends on the type of the motor and riding style. Contact your dealer/serviceman if visible changes appear on muffler's outer sleeve or the noise level is increased.
3. Periodically make sure all the bolts and springs are sufficiently tight.

YAMAHA YZ 450F, Complete exhaust system / Racing line
Product code: S-Y4MR6-QT

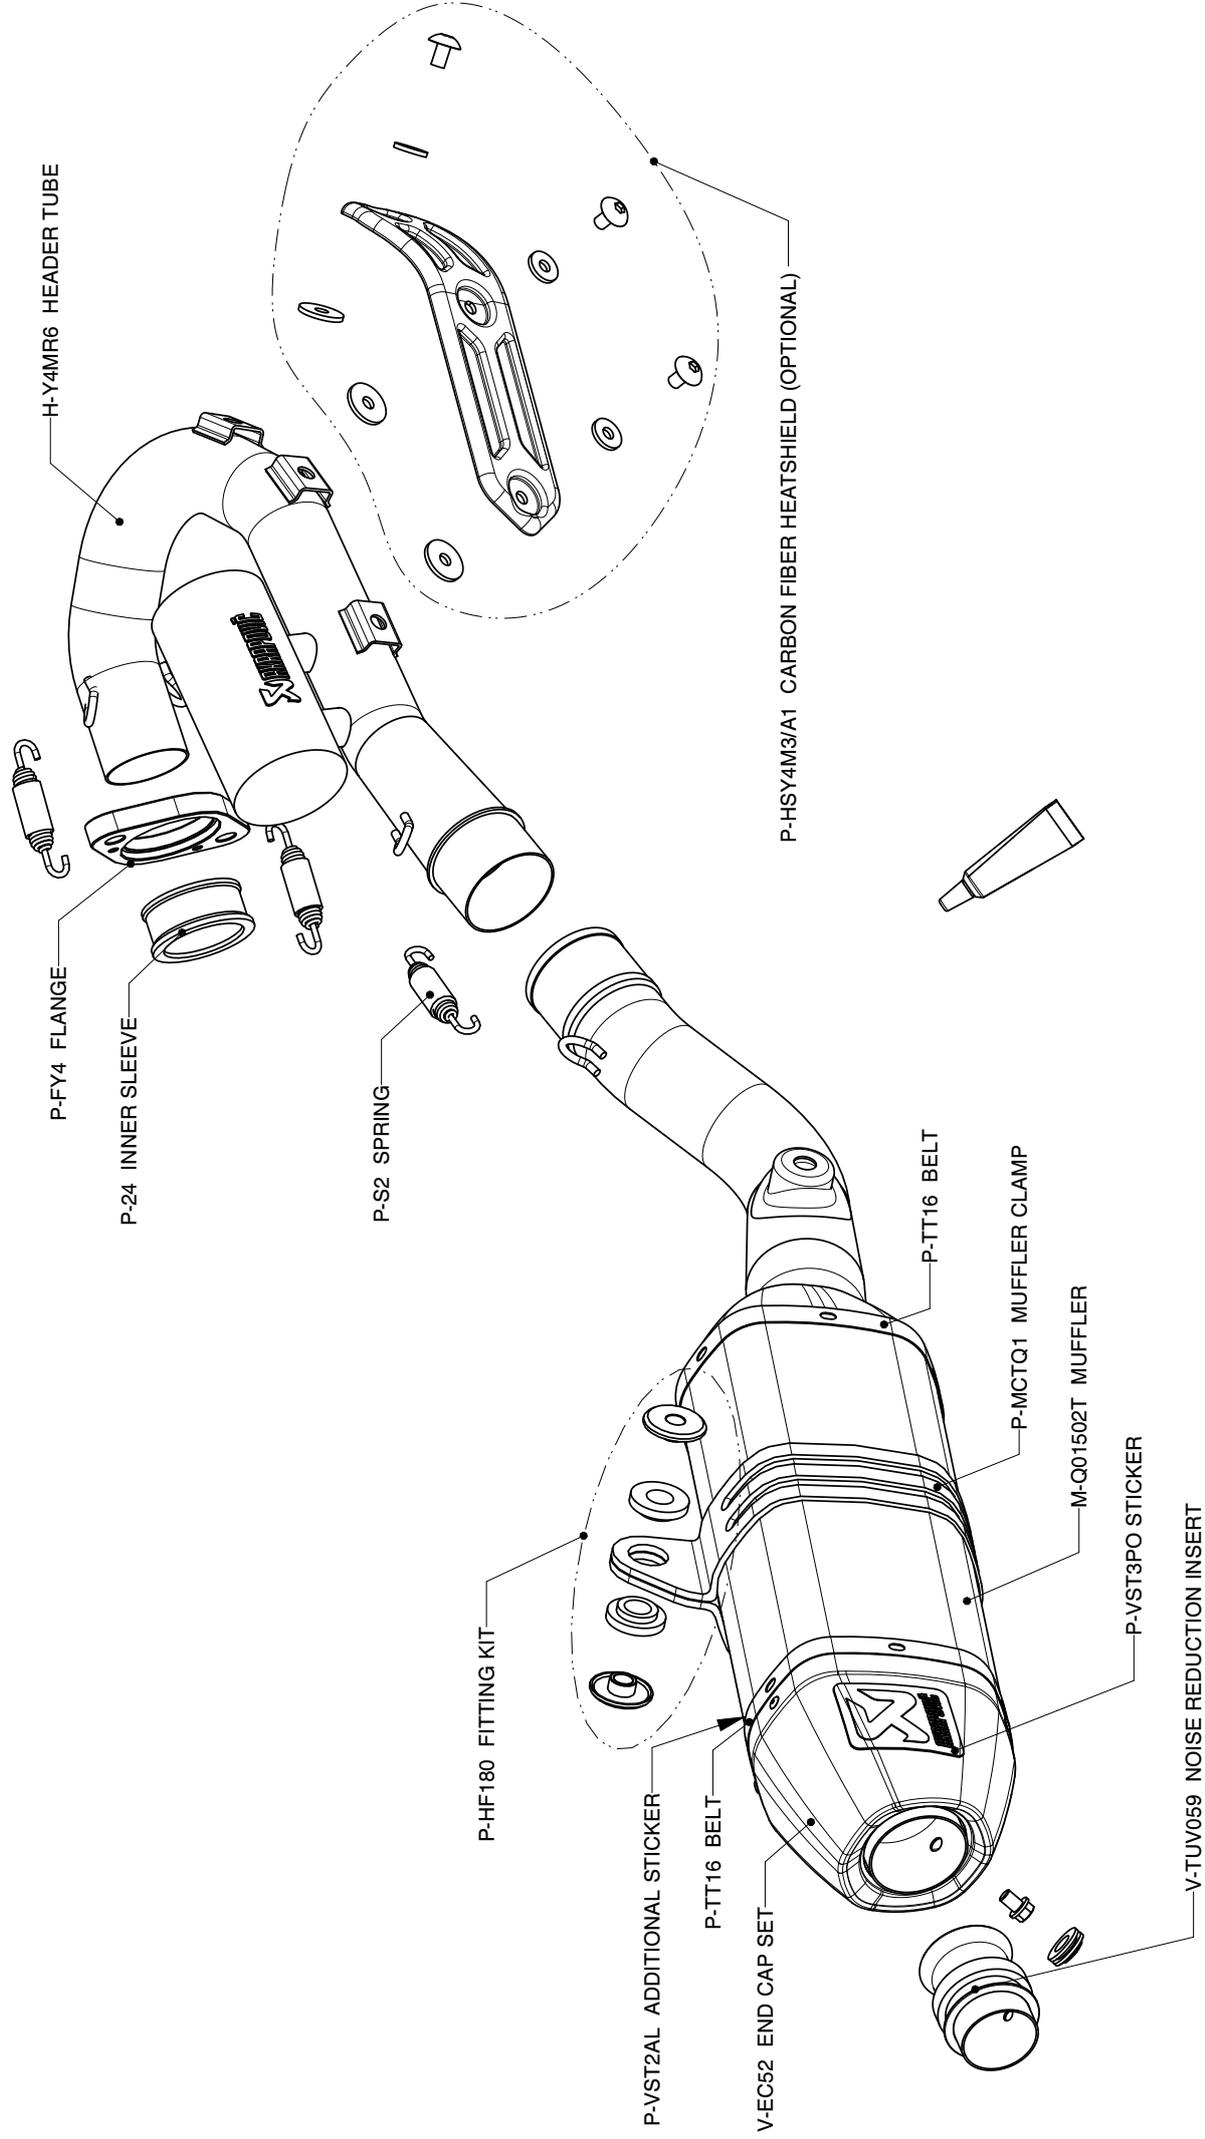


MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36

YAMAHA YZ 450F, Complete exhaust system / Racing line with Spark Arrester
Product code: S-Y4MR6-QTA

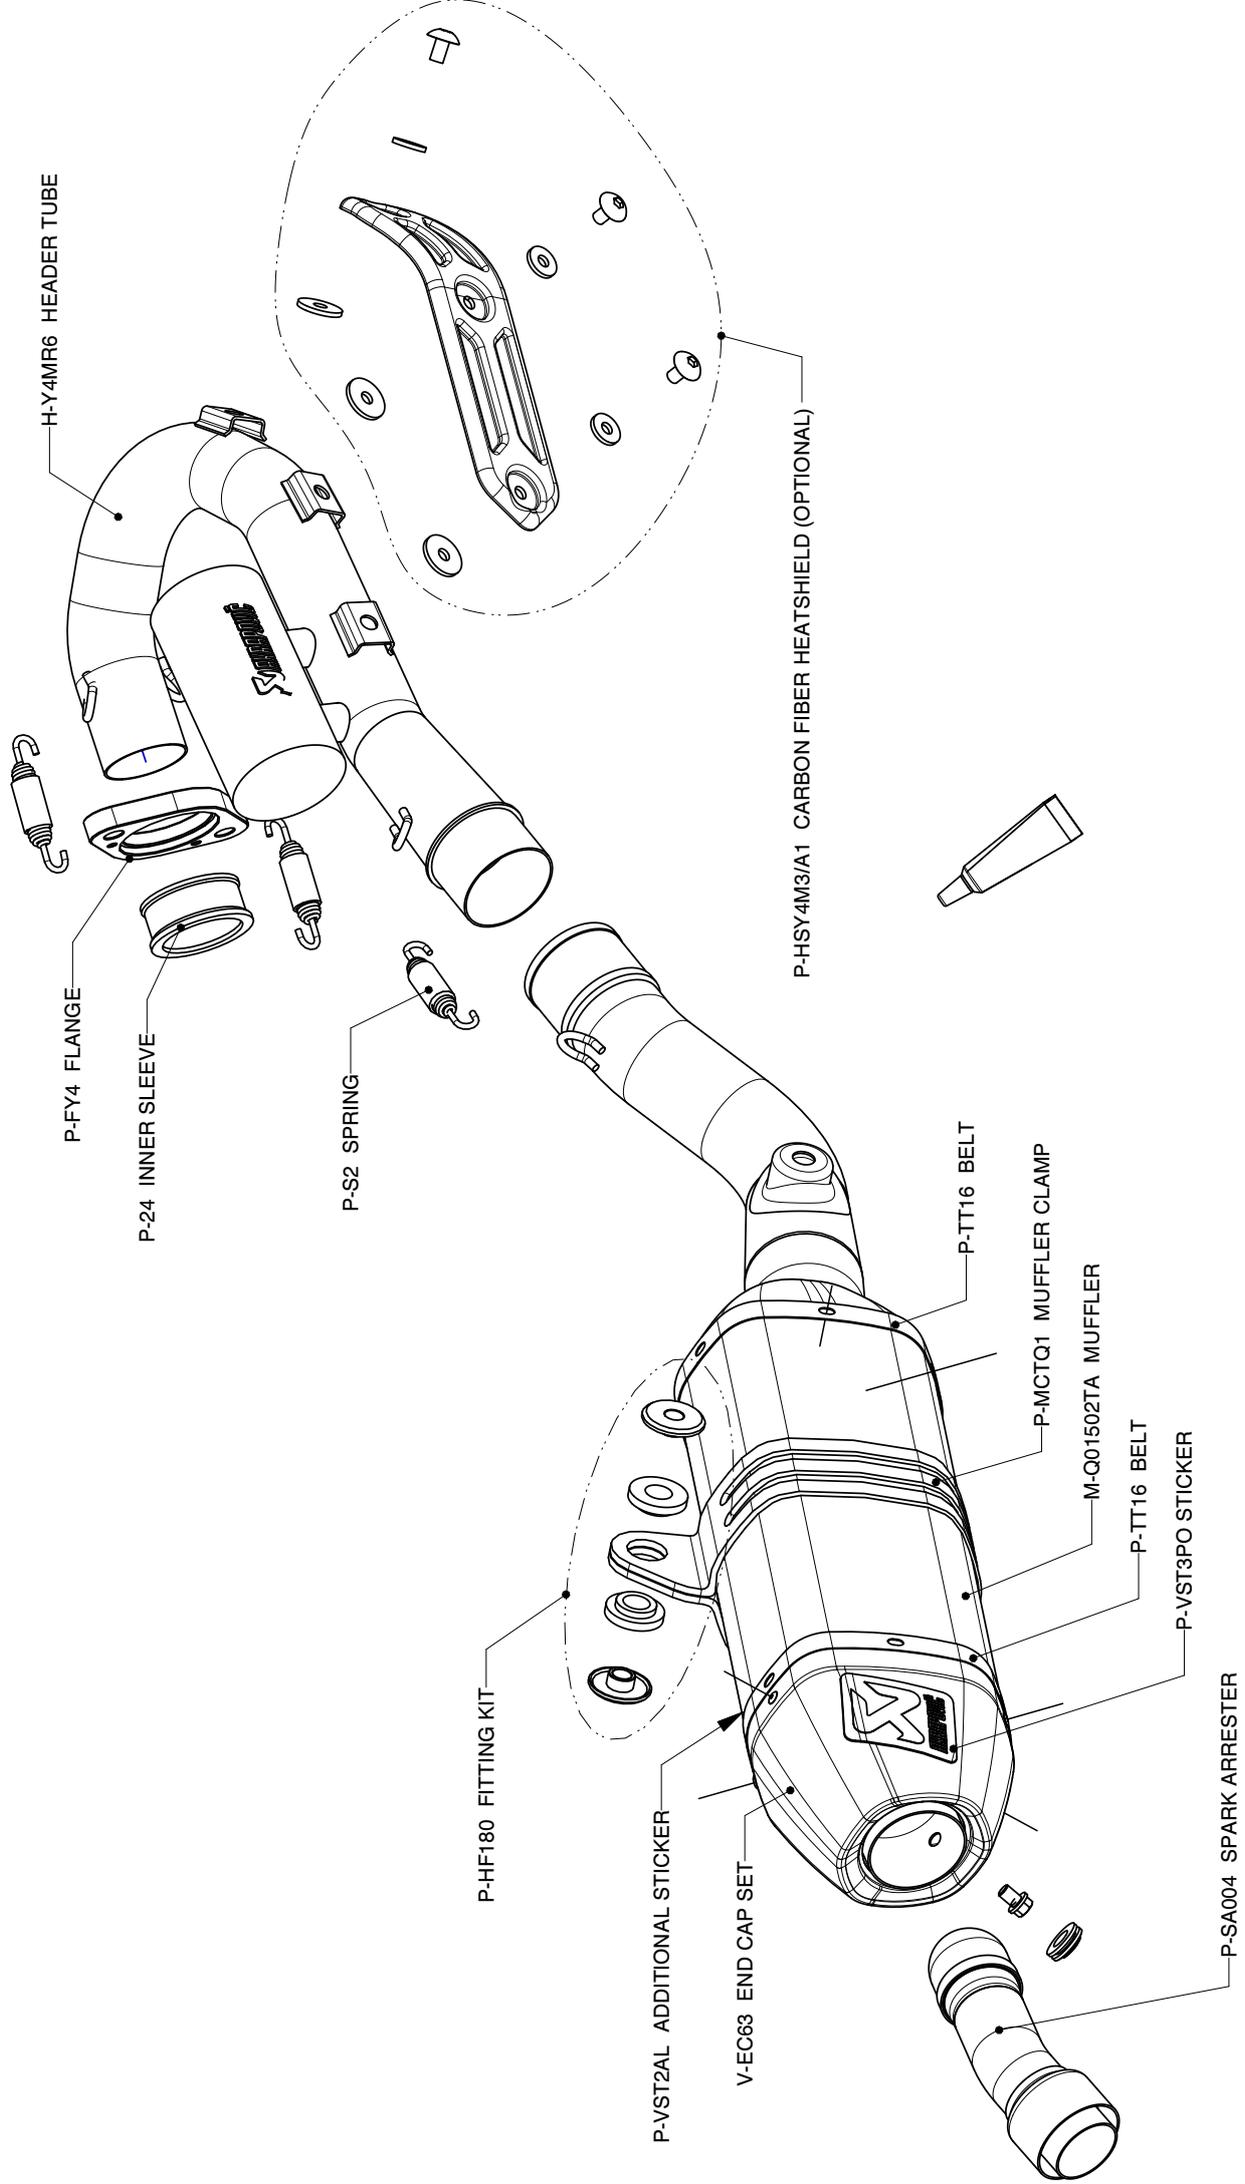


MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36

YAMAHA YZ 450F, Complete exhaust system / Evolution line
Product code: S-Y4MET6-QT

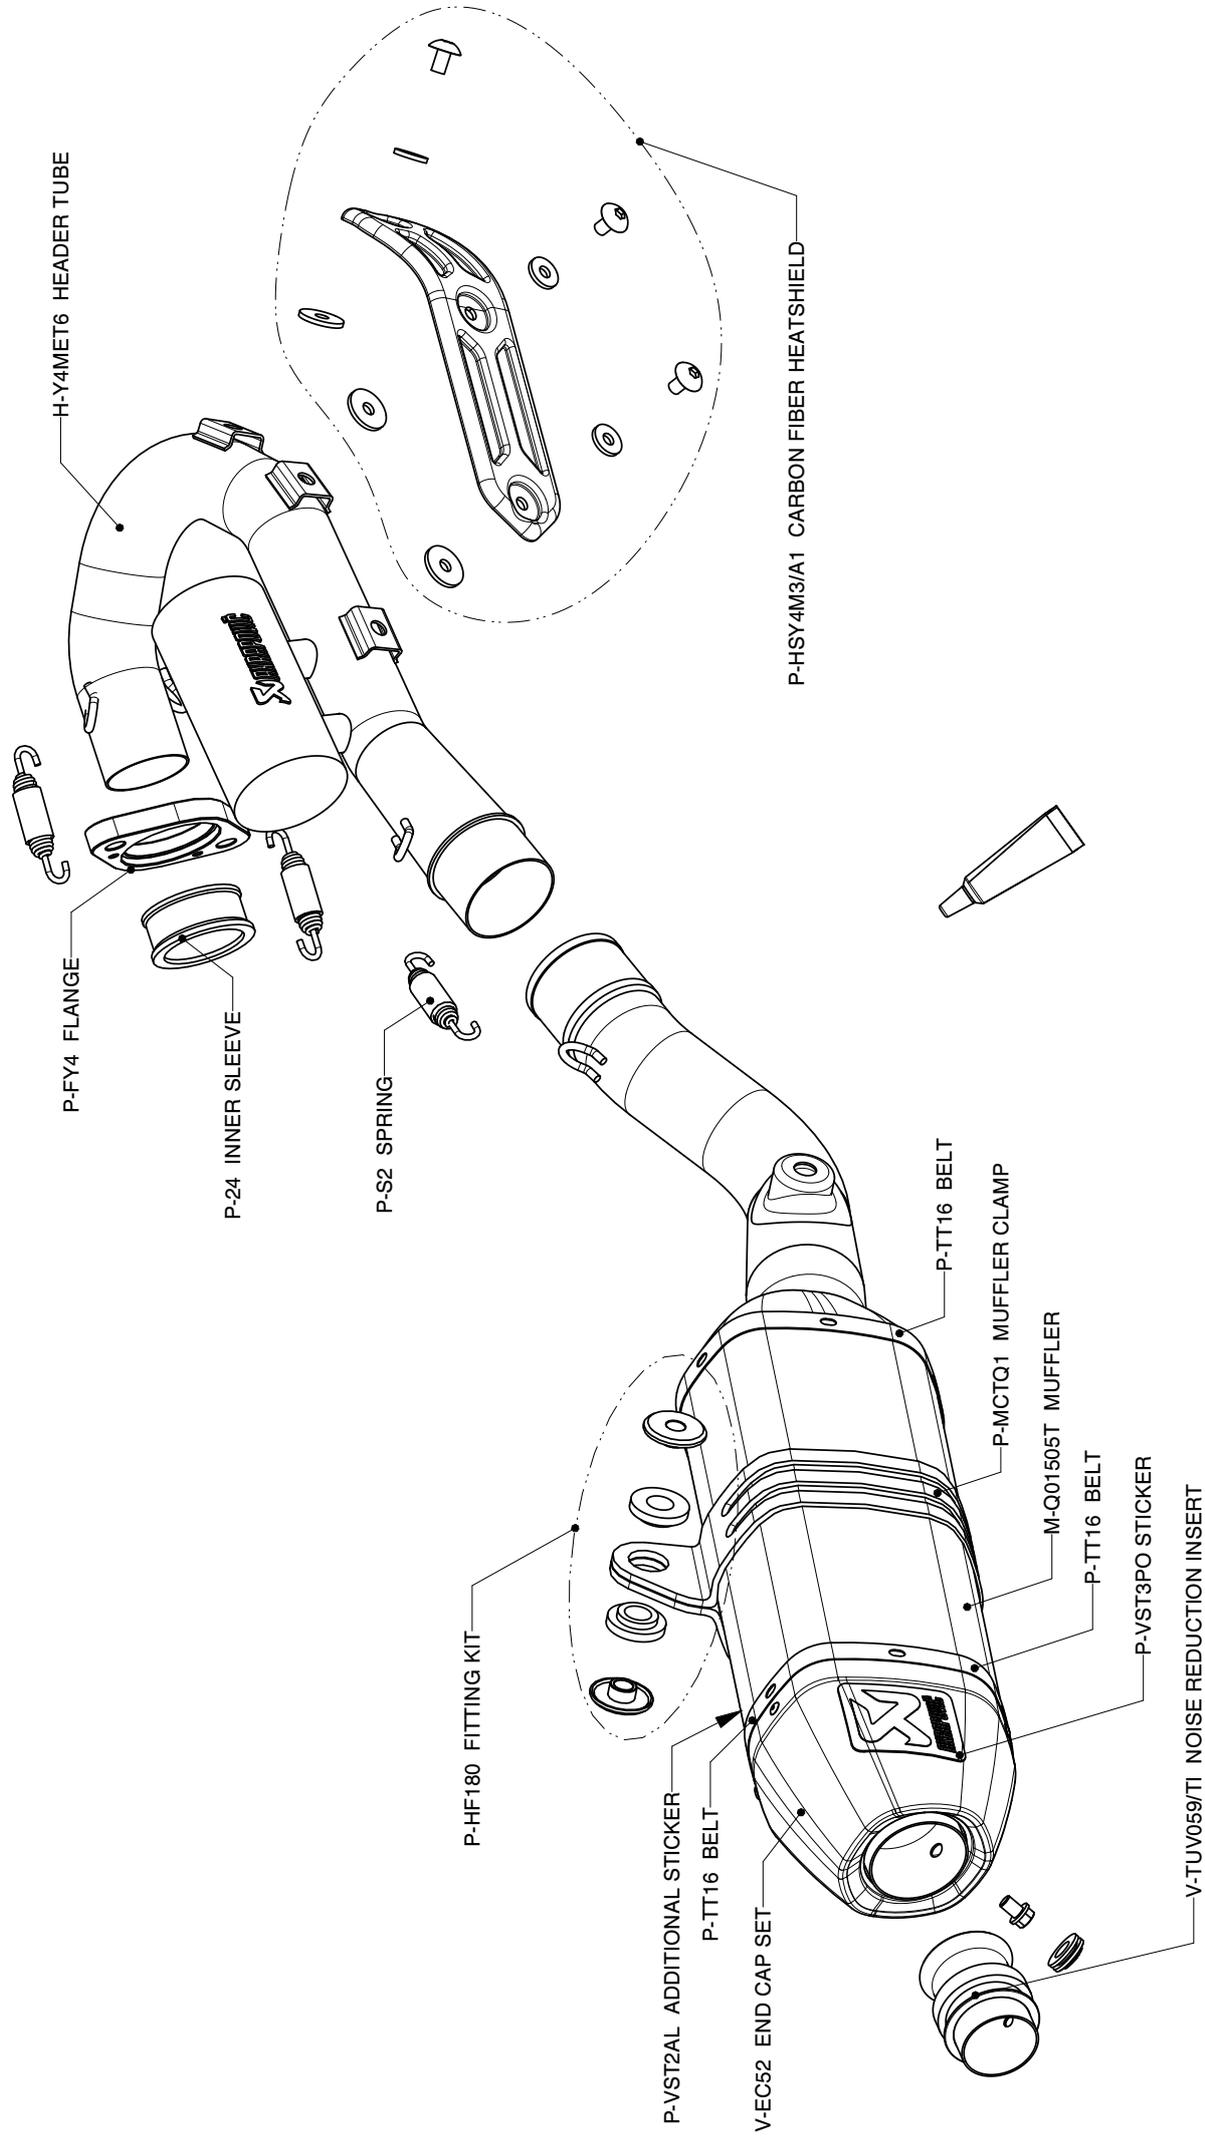

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36


YAMAHA YZ 450F, Complete exhaust system / Evolution line with Spark Arrester
Product code: S-Y4MET6-QTA

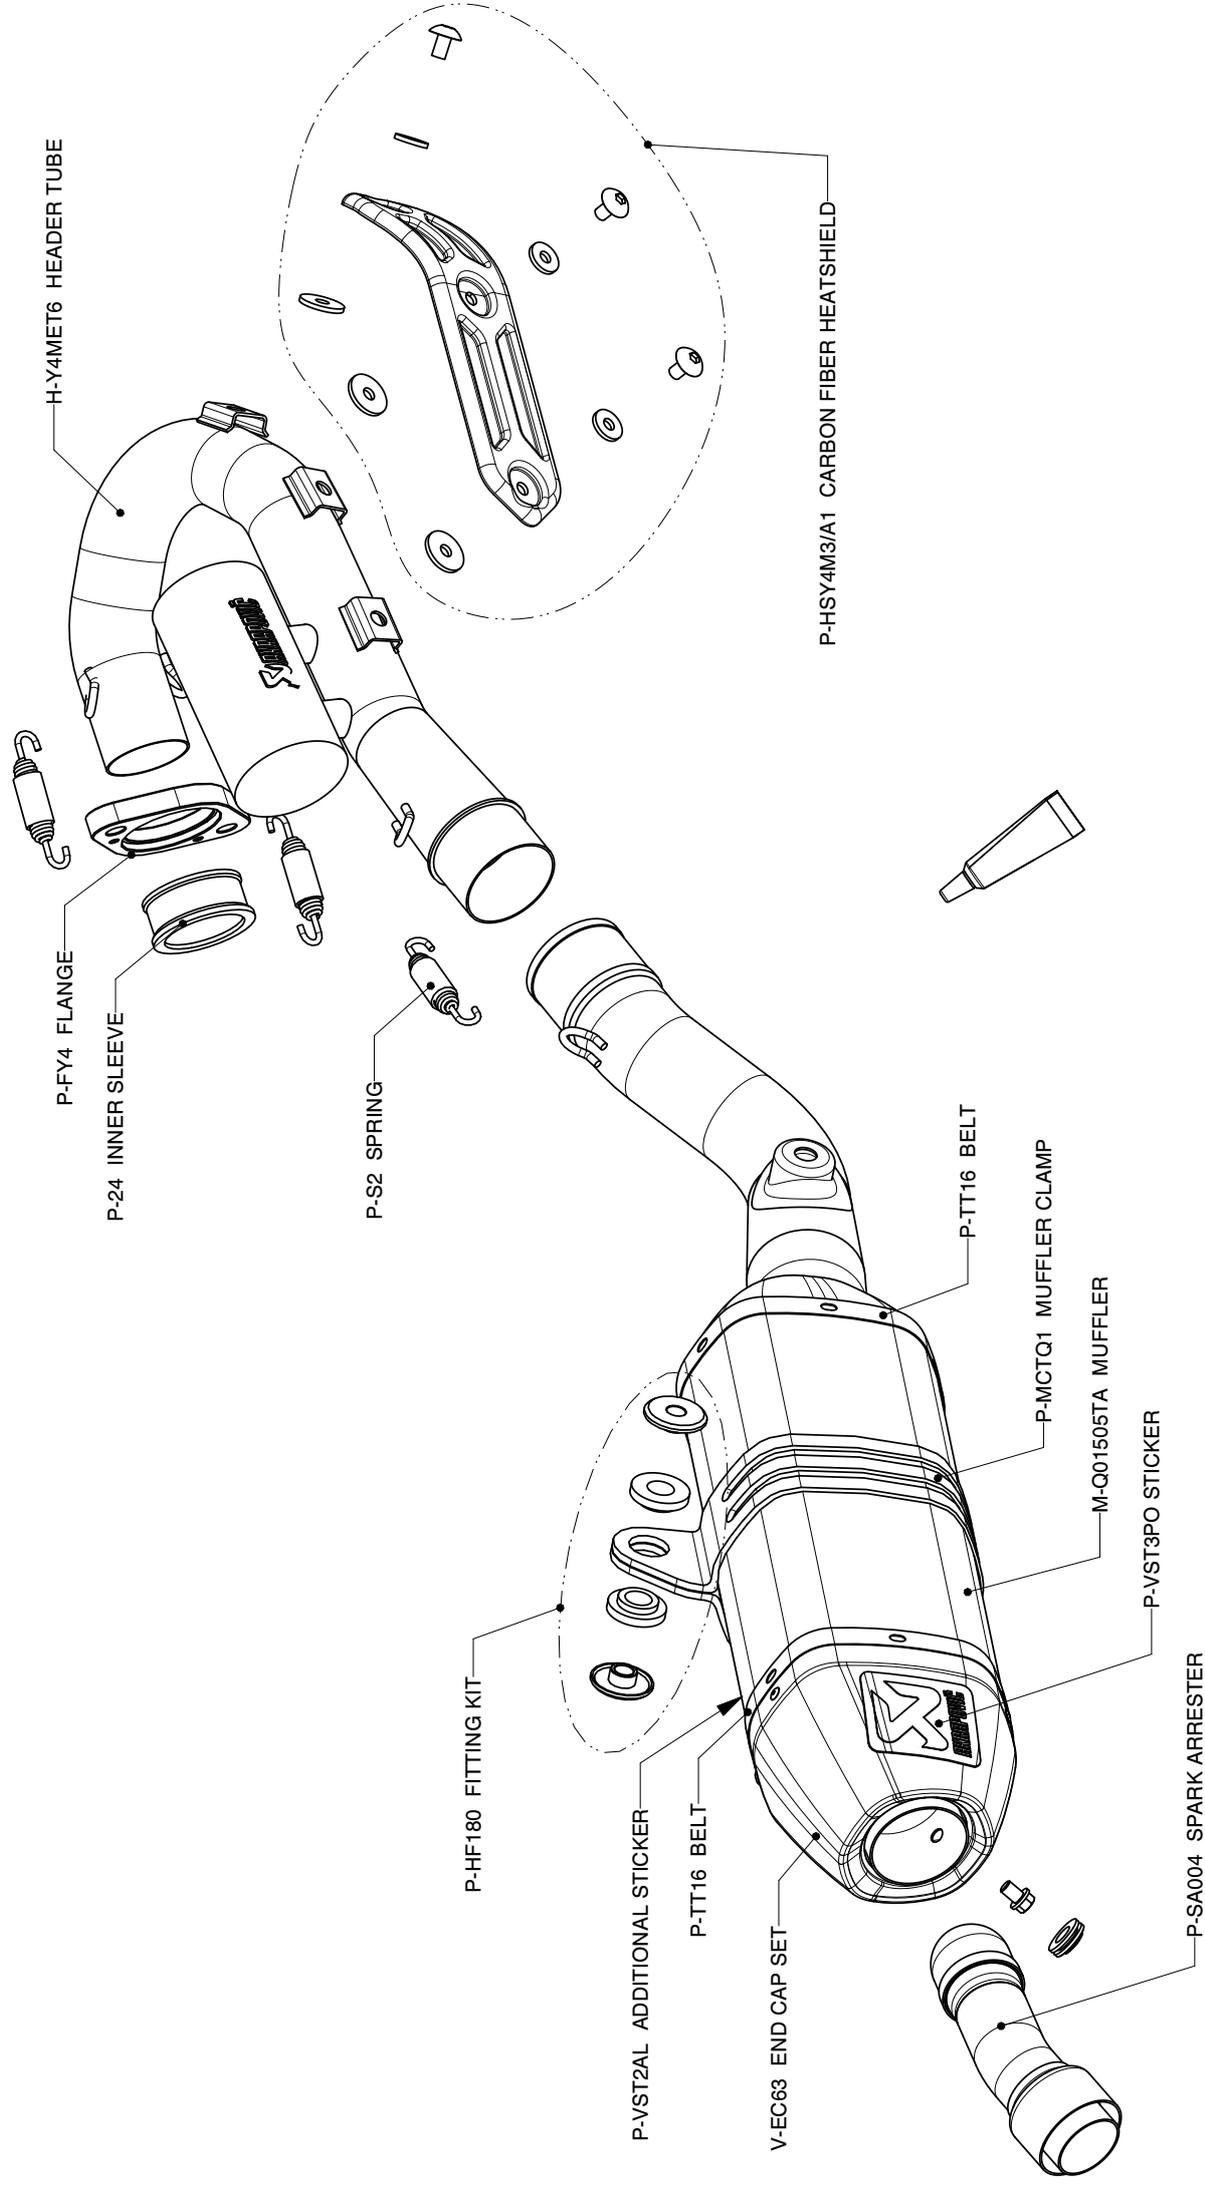

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36


YAMAHA WR 450F, Complete exhaust system/Racing line (spark arrester), with chamber, model year: 2007

Product code: S-Y4MR7-MTA

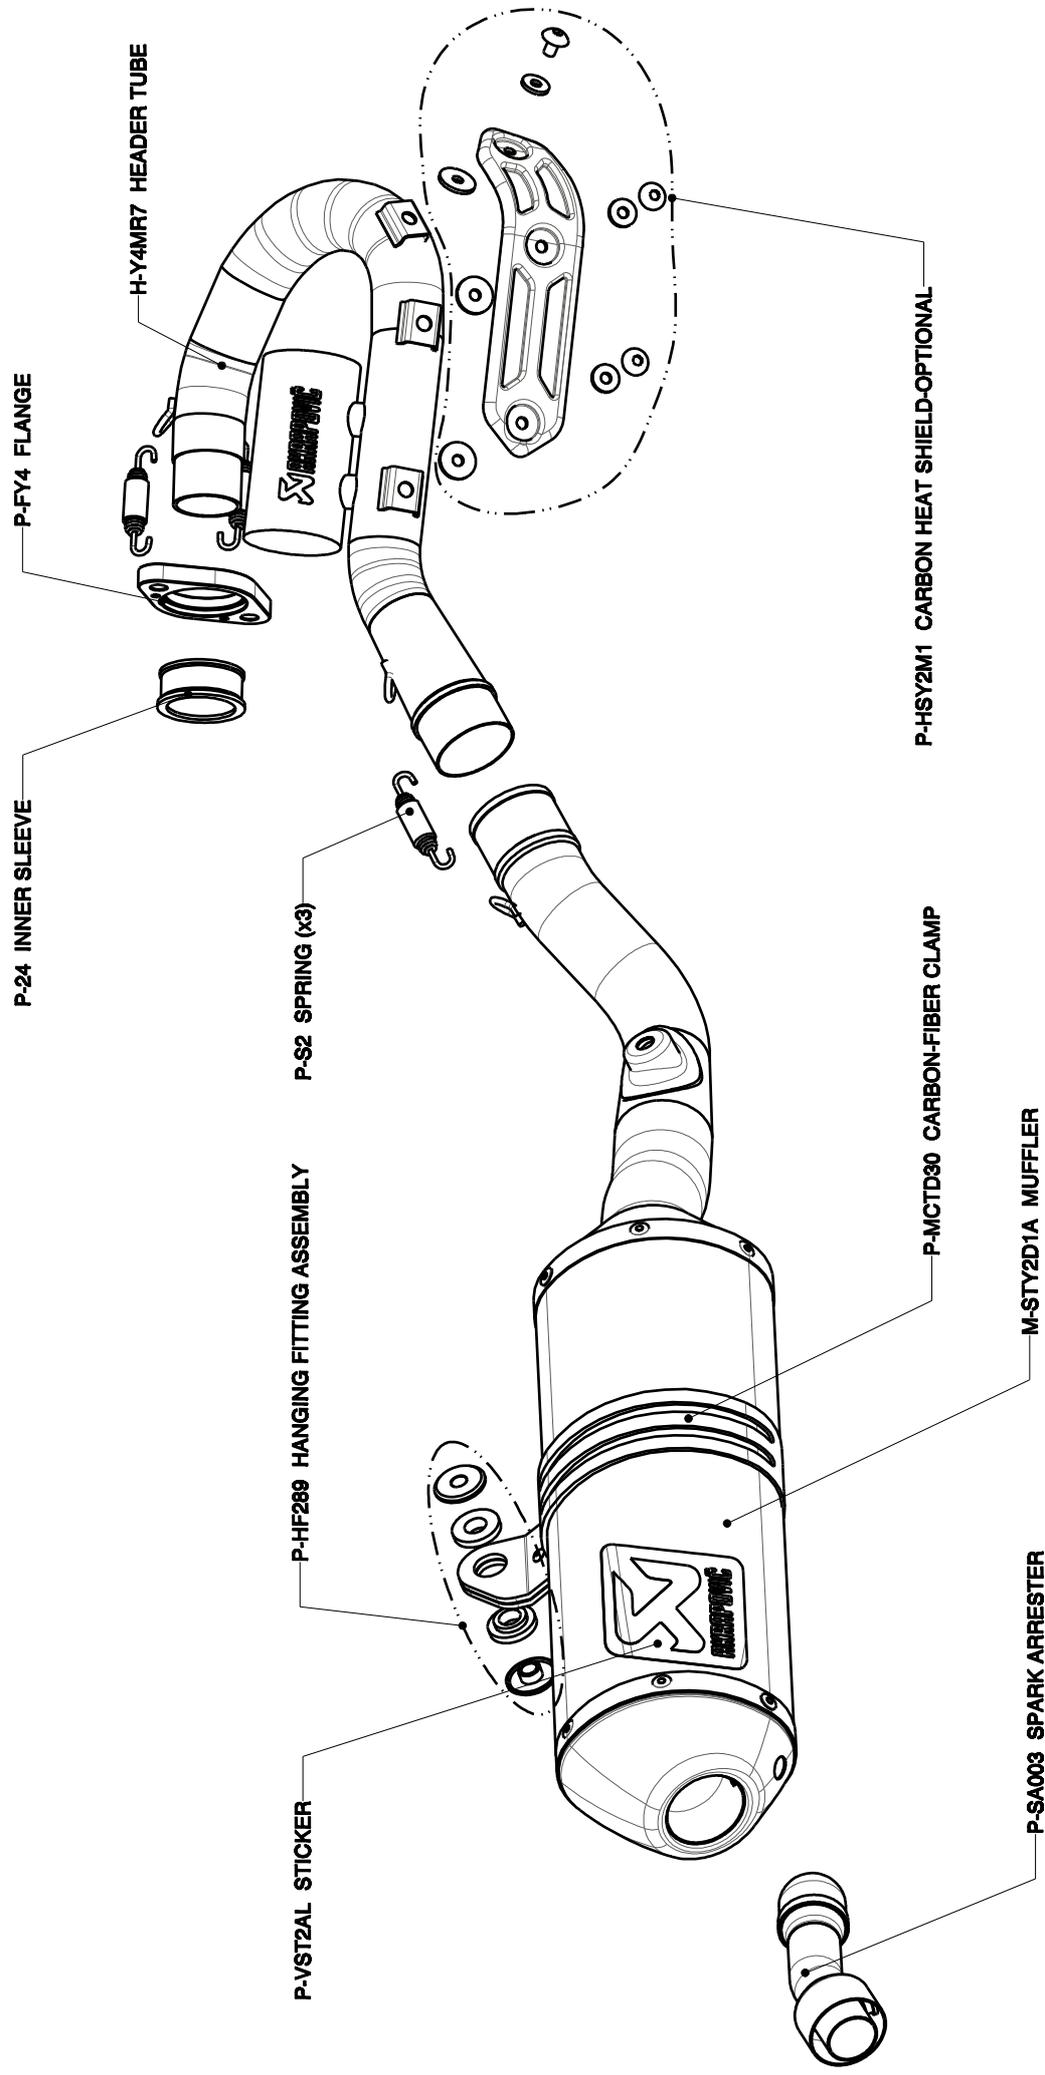


YAMAHA WR 450F, Complete exhaust system/Evolution line (spark arrester), with chamber, model year: 2007

Product code: S-Y4MET7-MTA

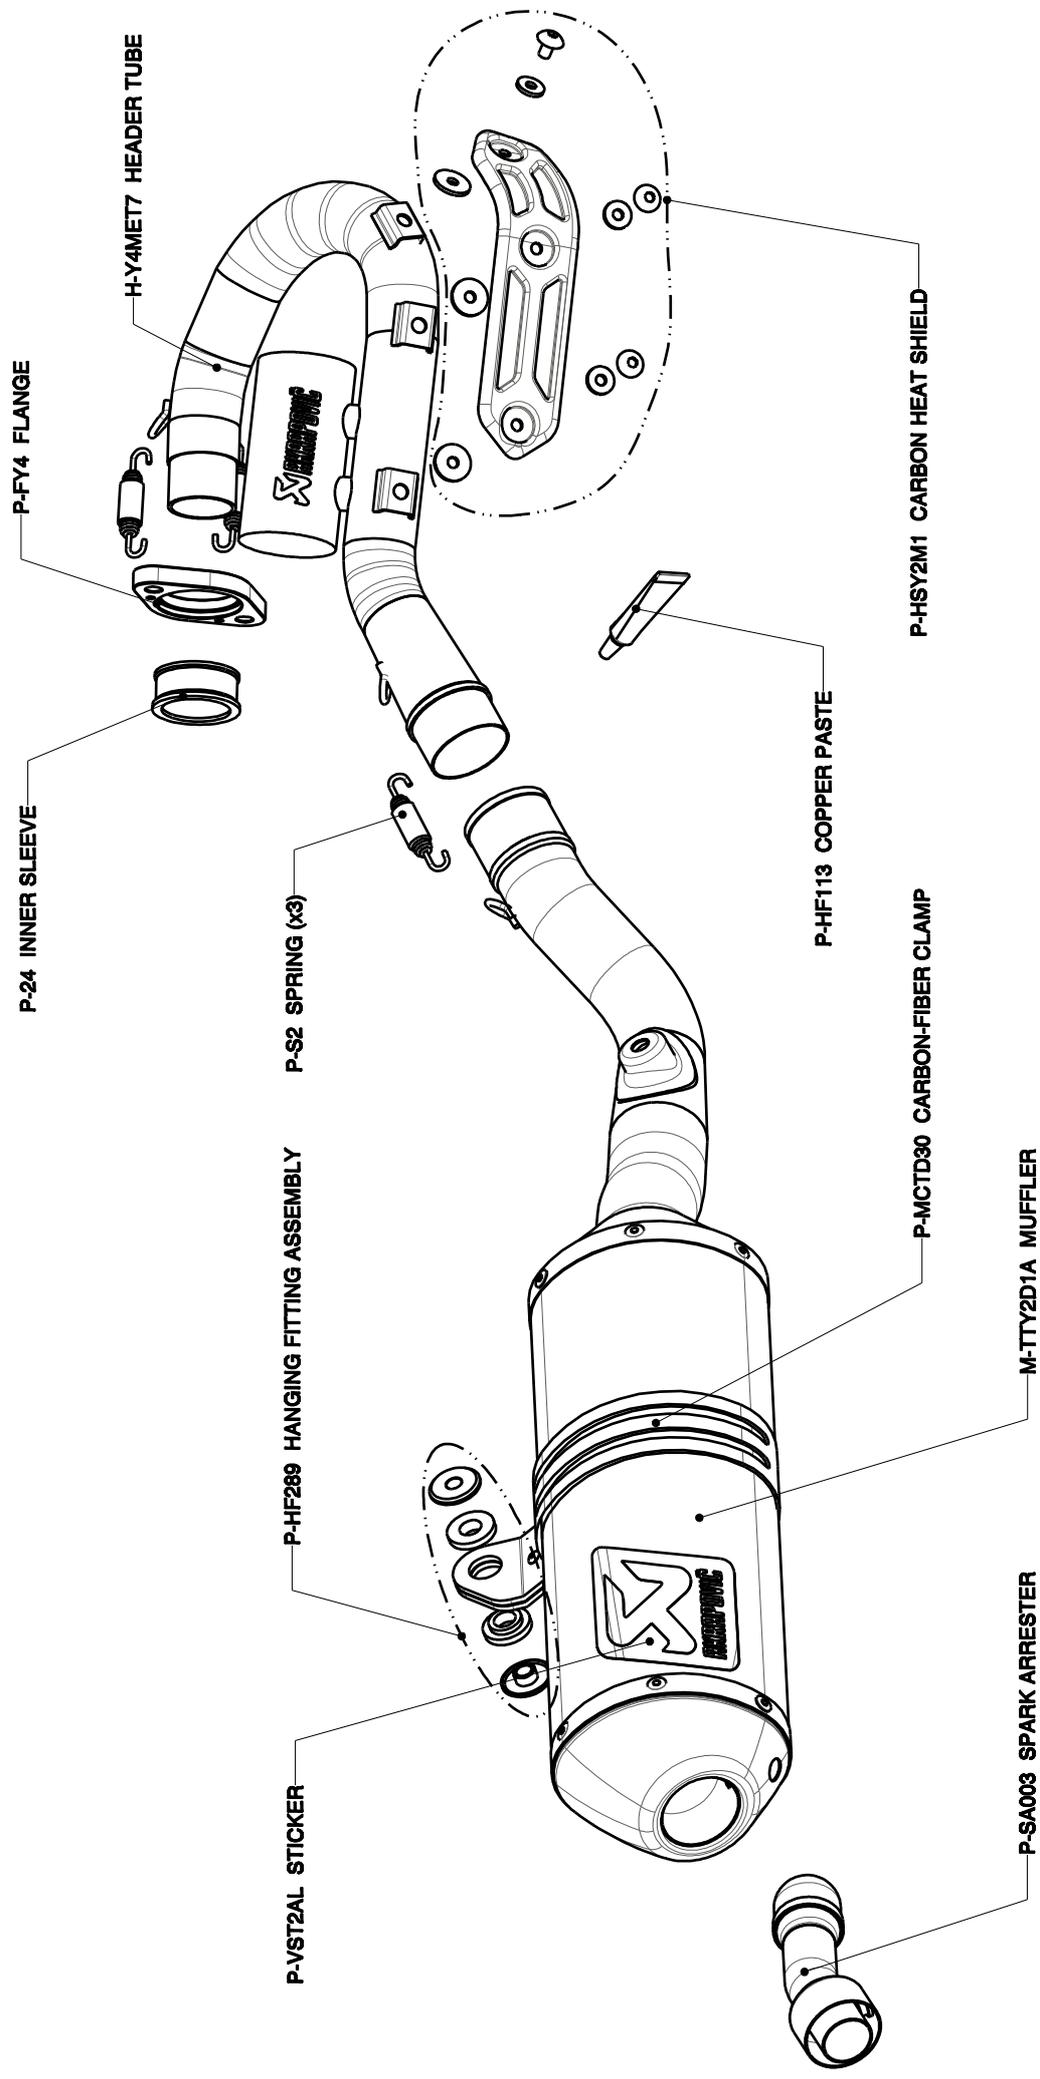


YAMAHA YZ 450F, Complete exhaust system / Racing line
Product code: S-Y4MR8-QT

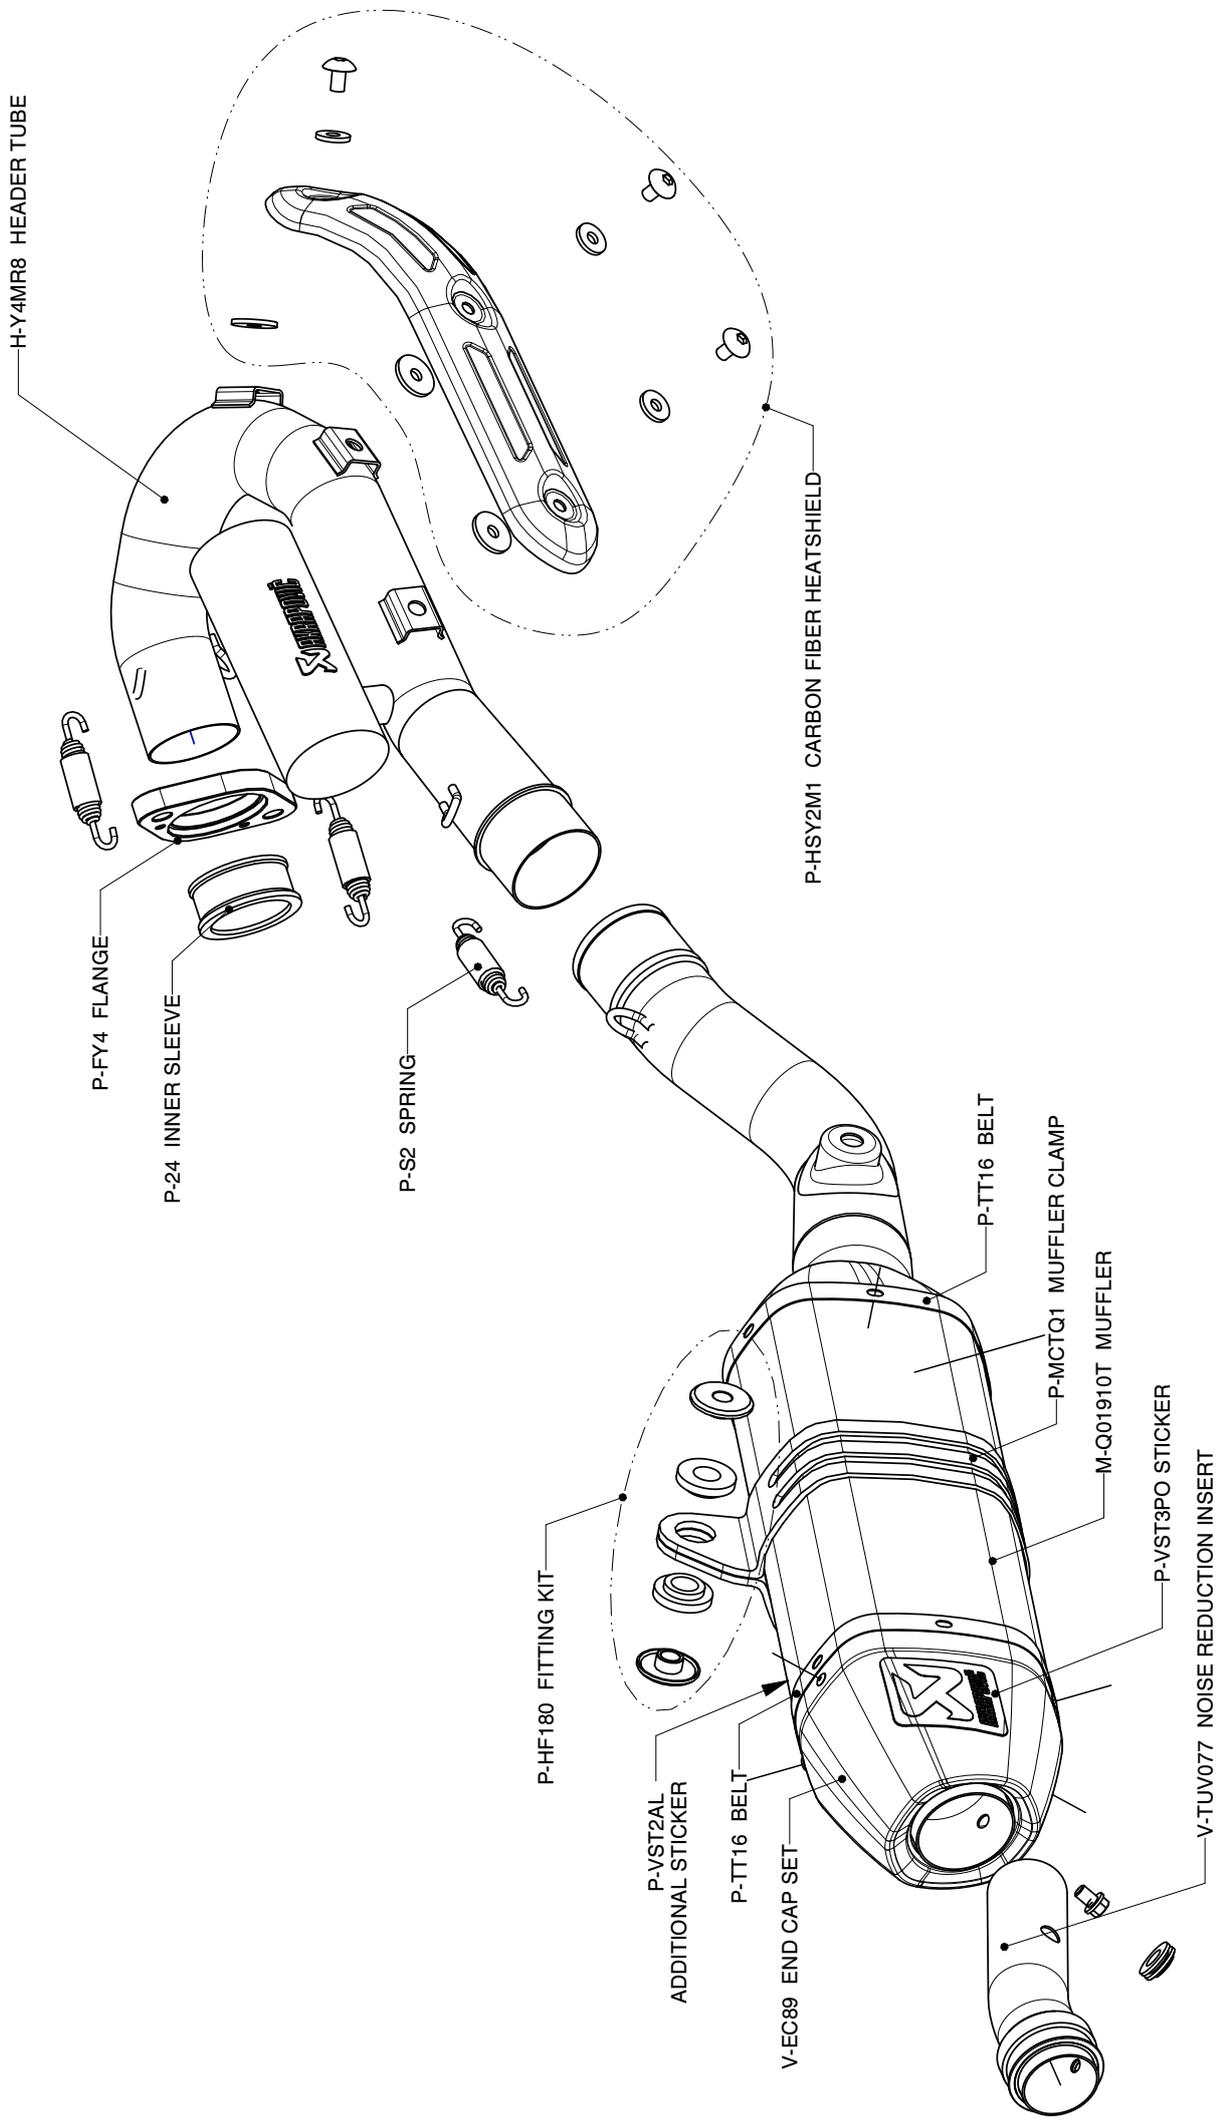

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT38


YAMAHA YZ 450F, Complete exhaust system / Racing line with Spark Arrester

Product code: S-Y4MR8-QTA

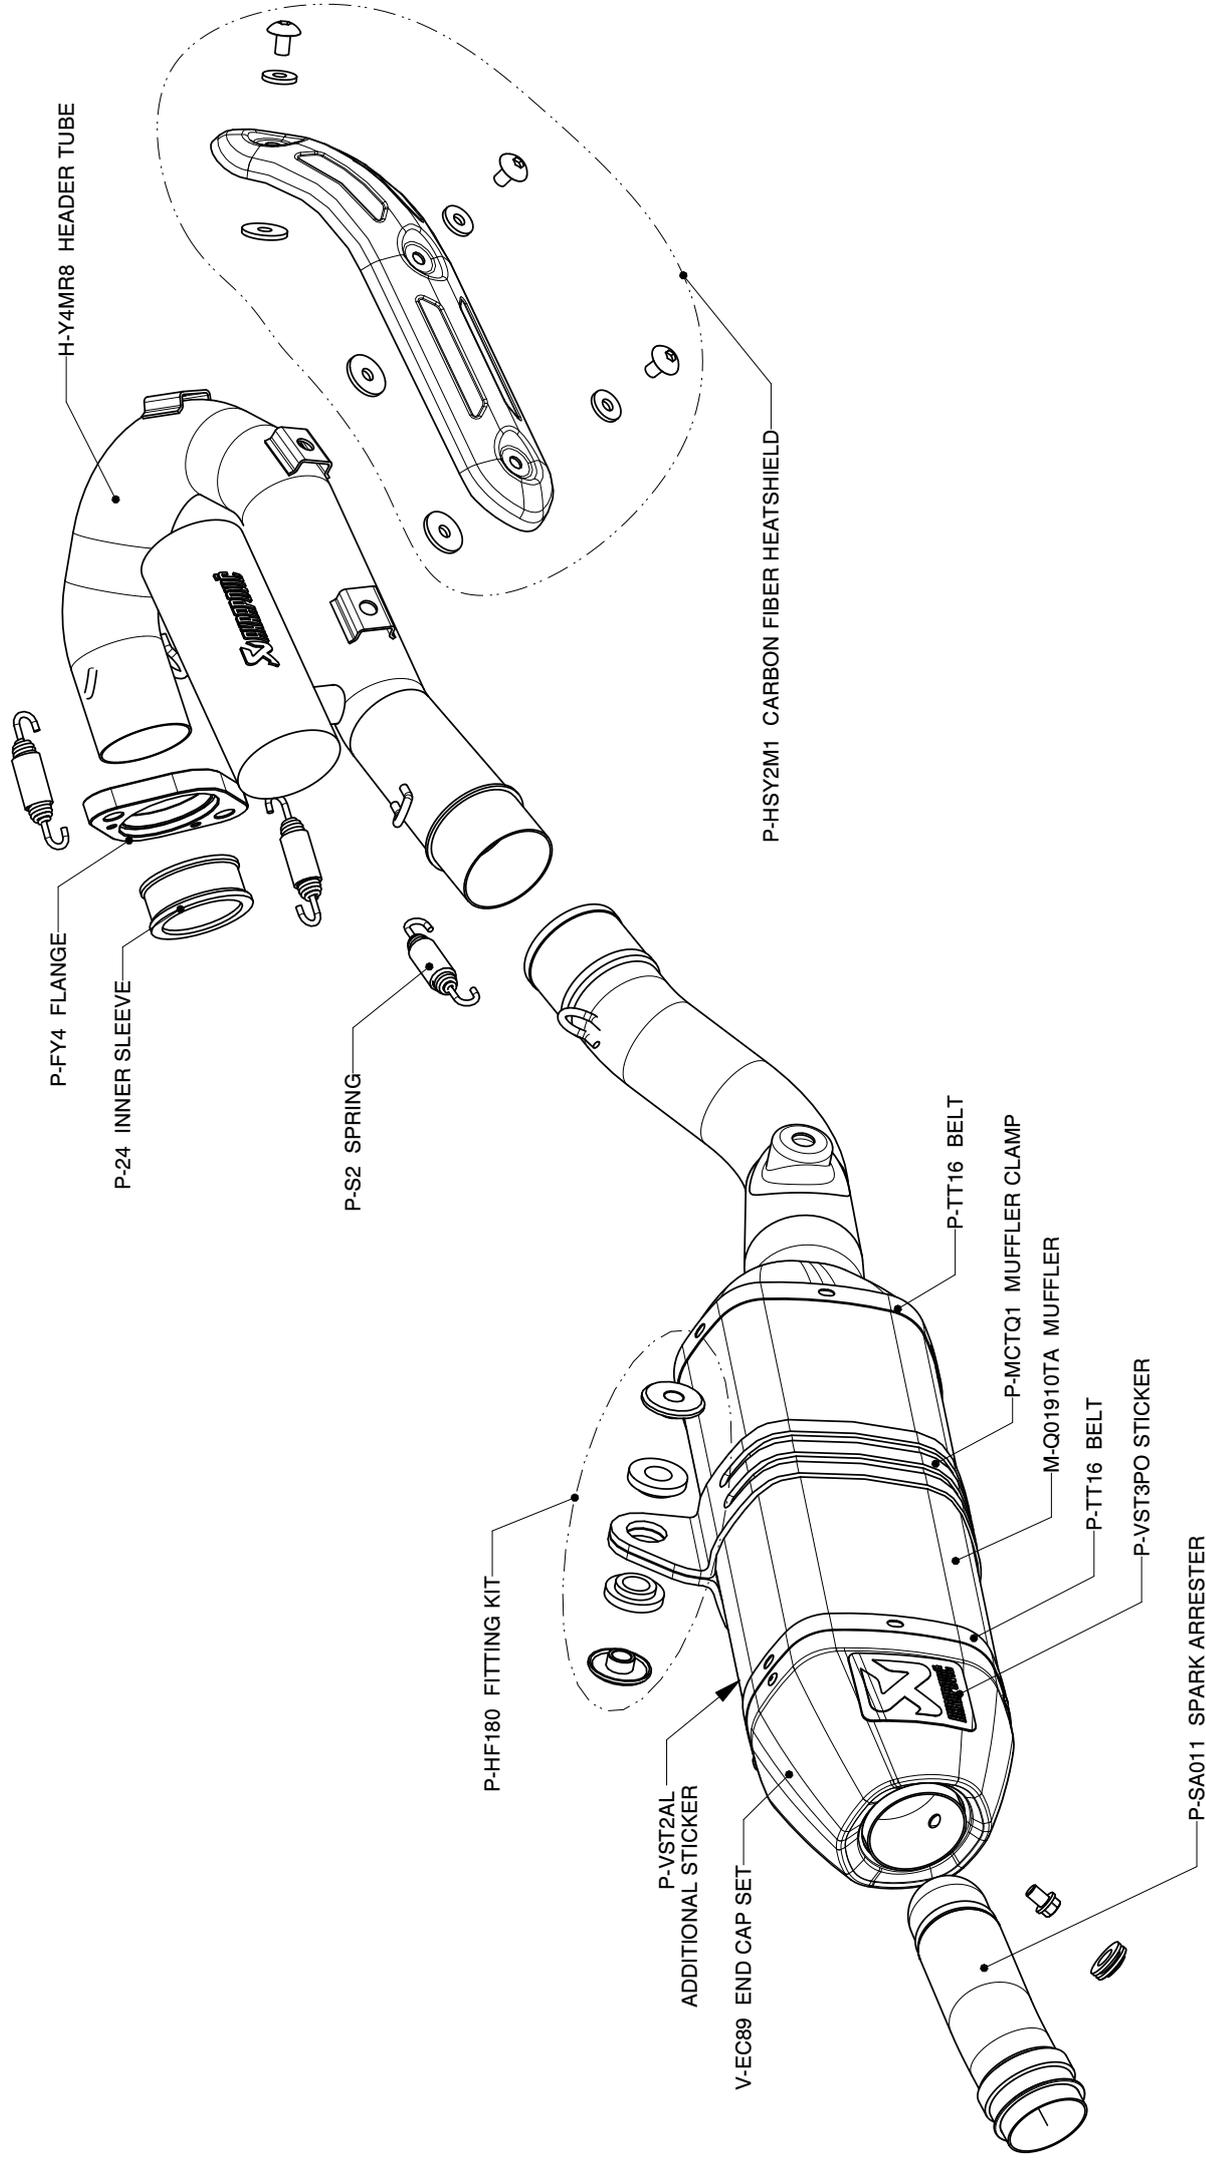

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS174QT38


YAMAHA YZ 450F, Complete exhaust system / Evolution line
Product code: S-Y4MET8-QT

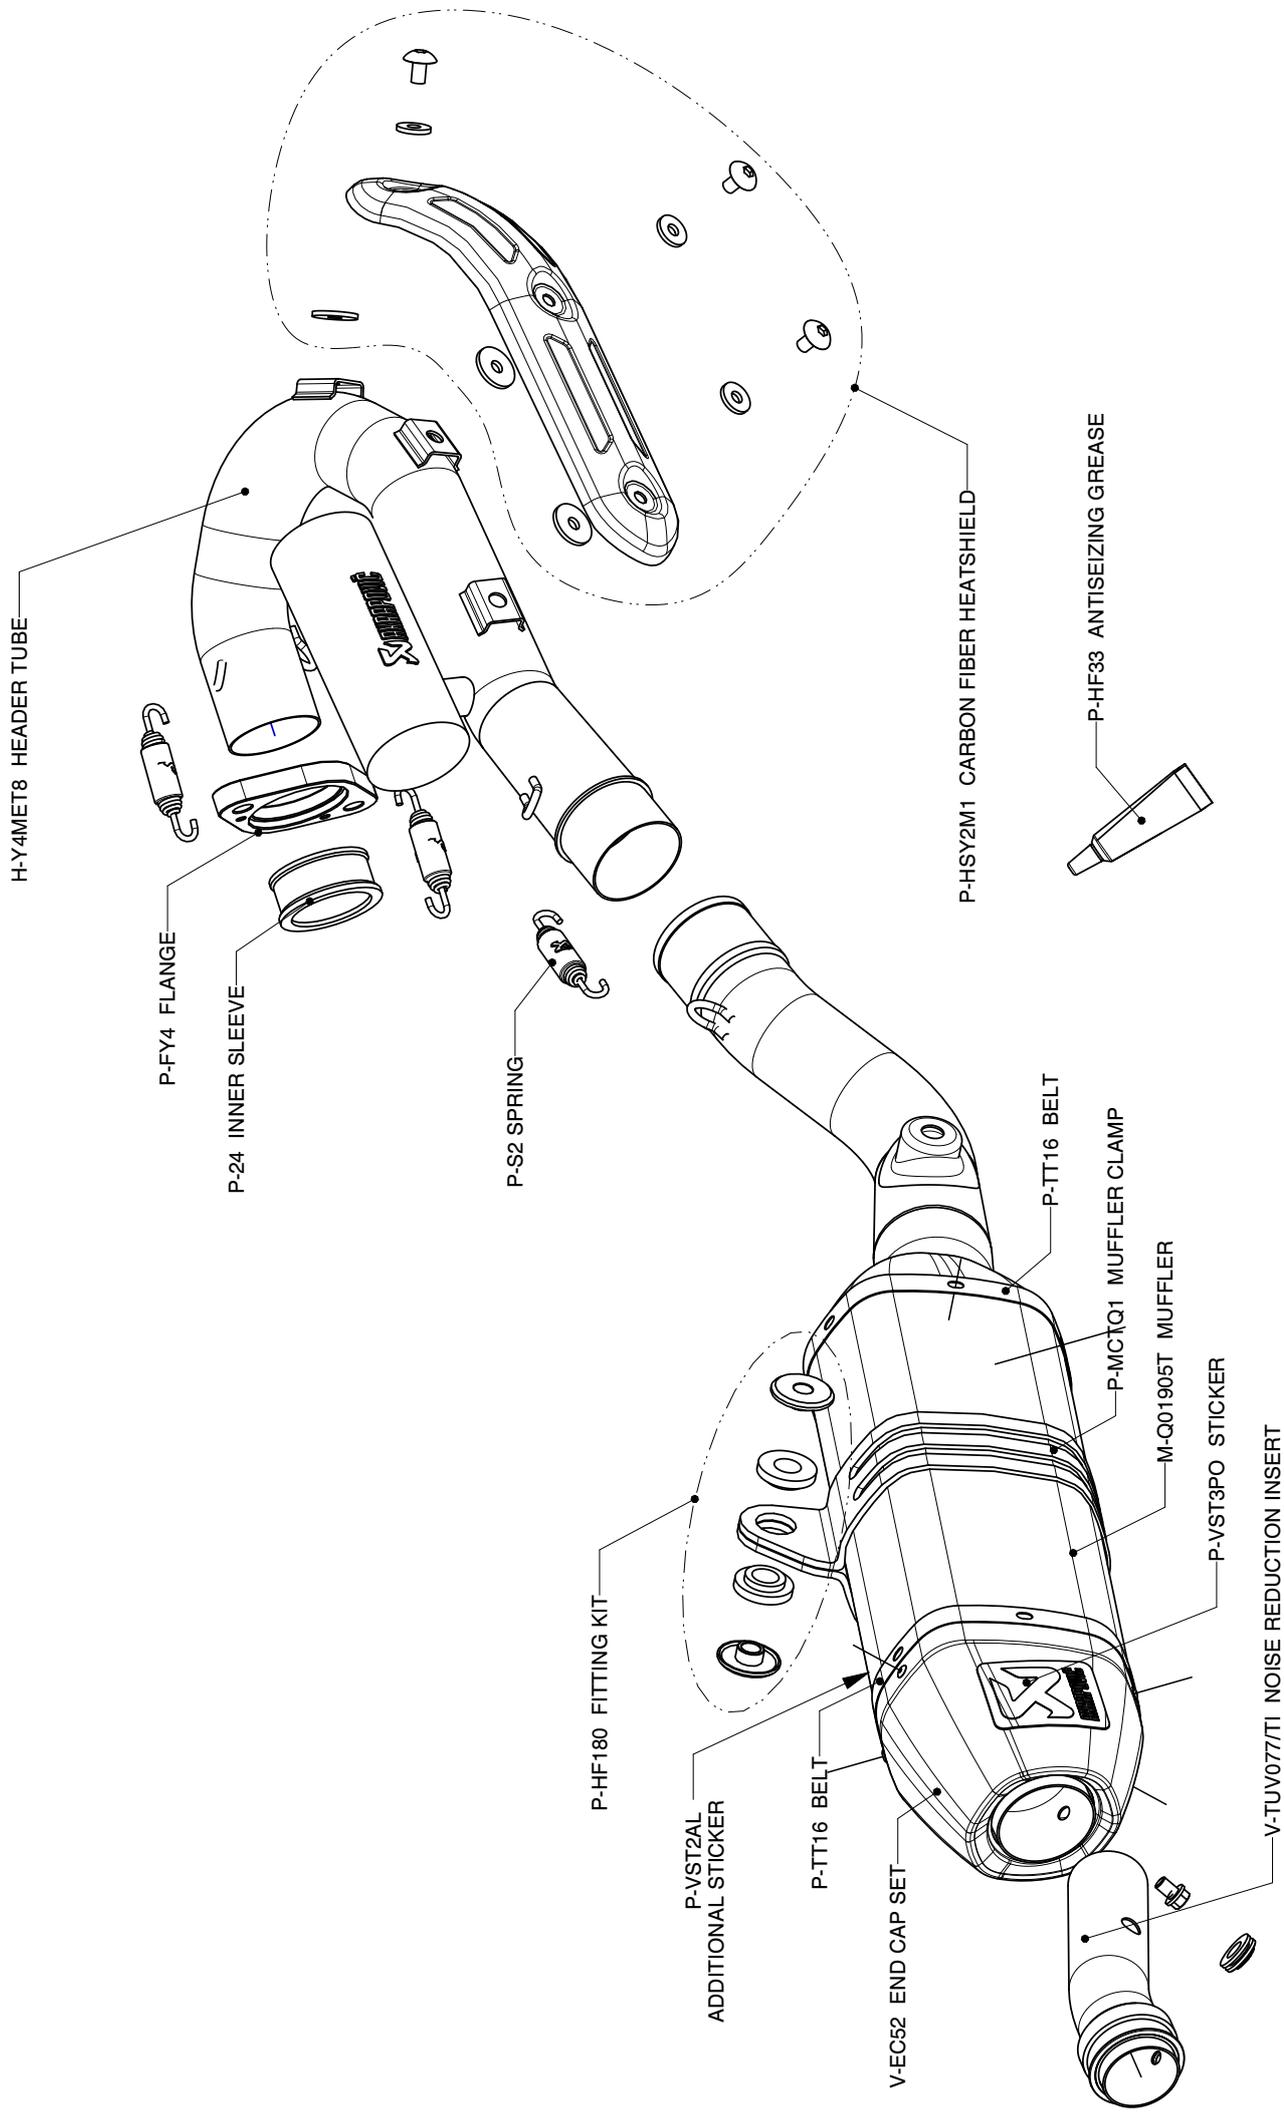

MUFFLER REPAIR KITS	
REPACK	P-FPCK22
SLEEVE	P-RKS92QT38


YAMAHA YZ 450F, Complete exhaust system / Evolution line with Spark Arrester

Product code: S-Y4MET8-QTA

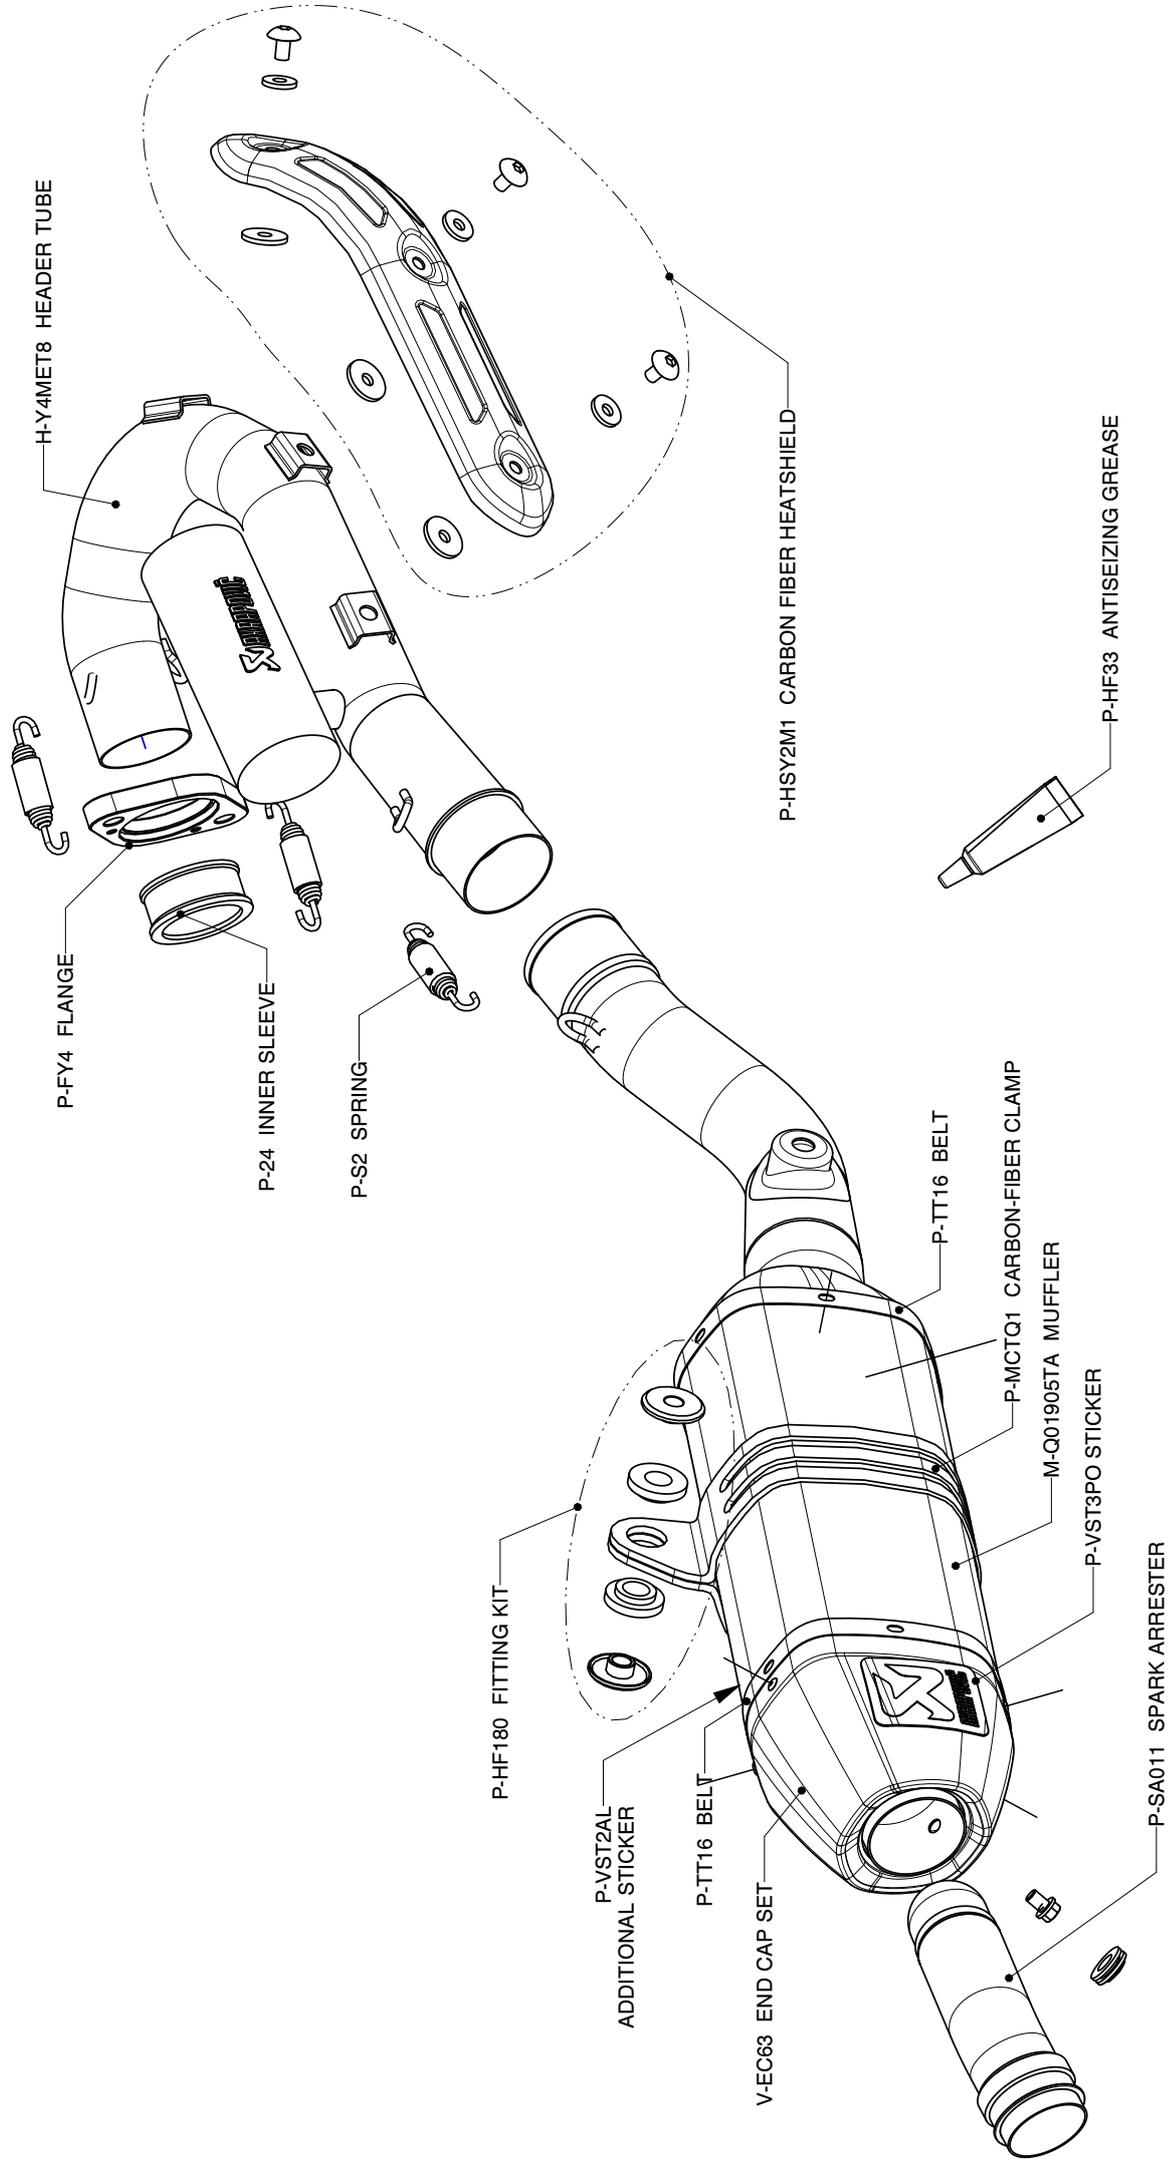


MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT38

YAMAHA YZ 450F, Complete exhaust system / RACING LINE
Product code: S-Y4MR9-QT

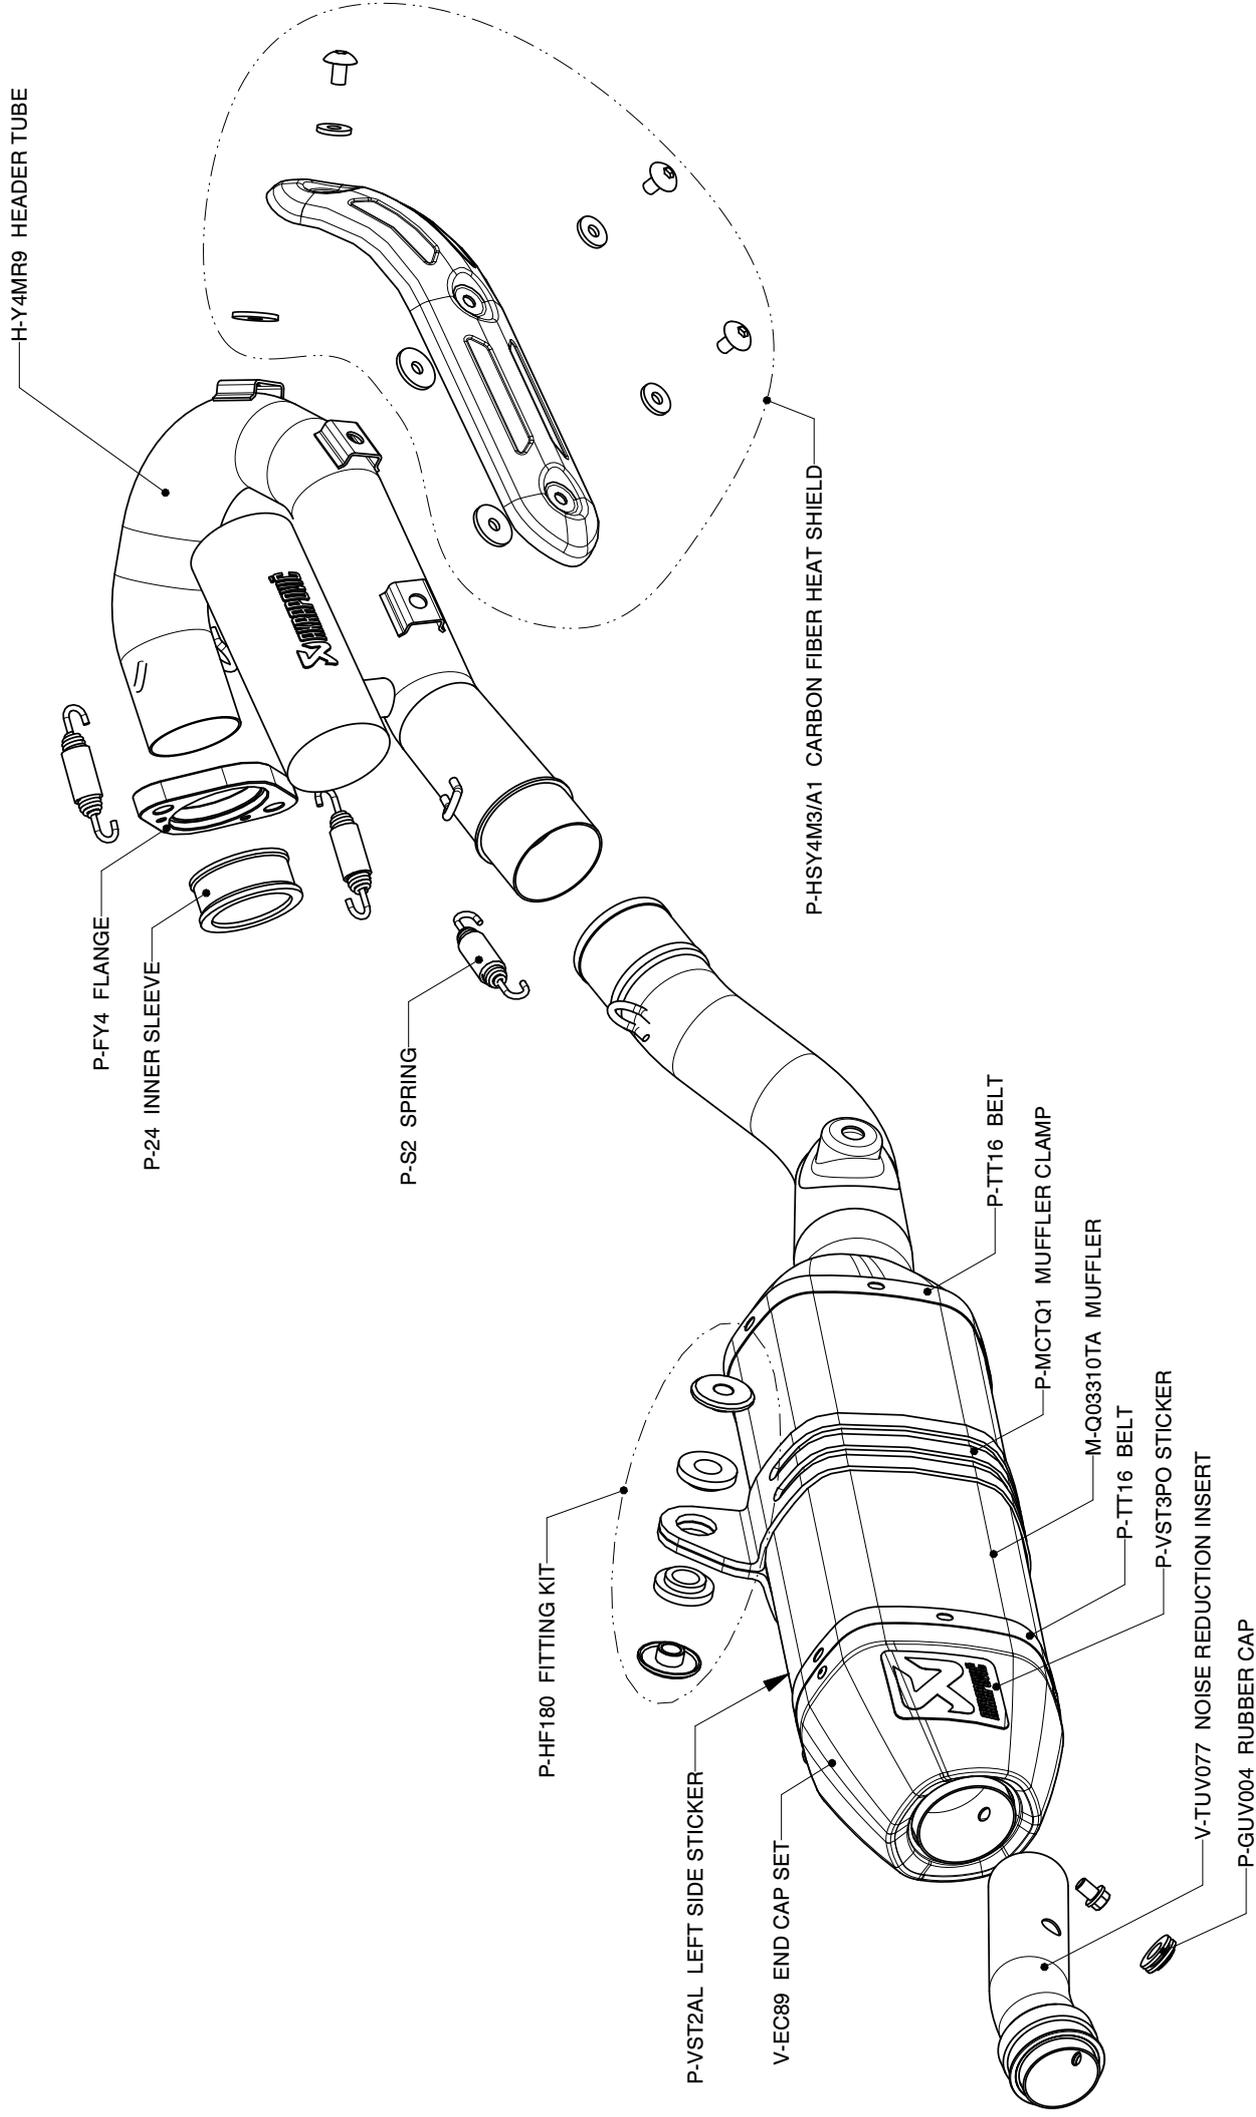

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36/1


YAMAHA YZ 450F, Complete exhaust system / RACING LINE (with Spark arrester)
Product code: S-Y4MR9-QTA

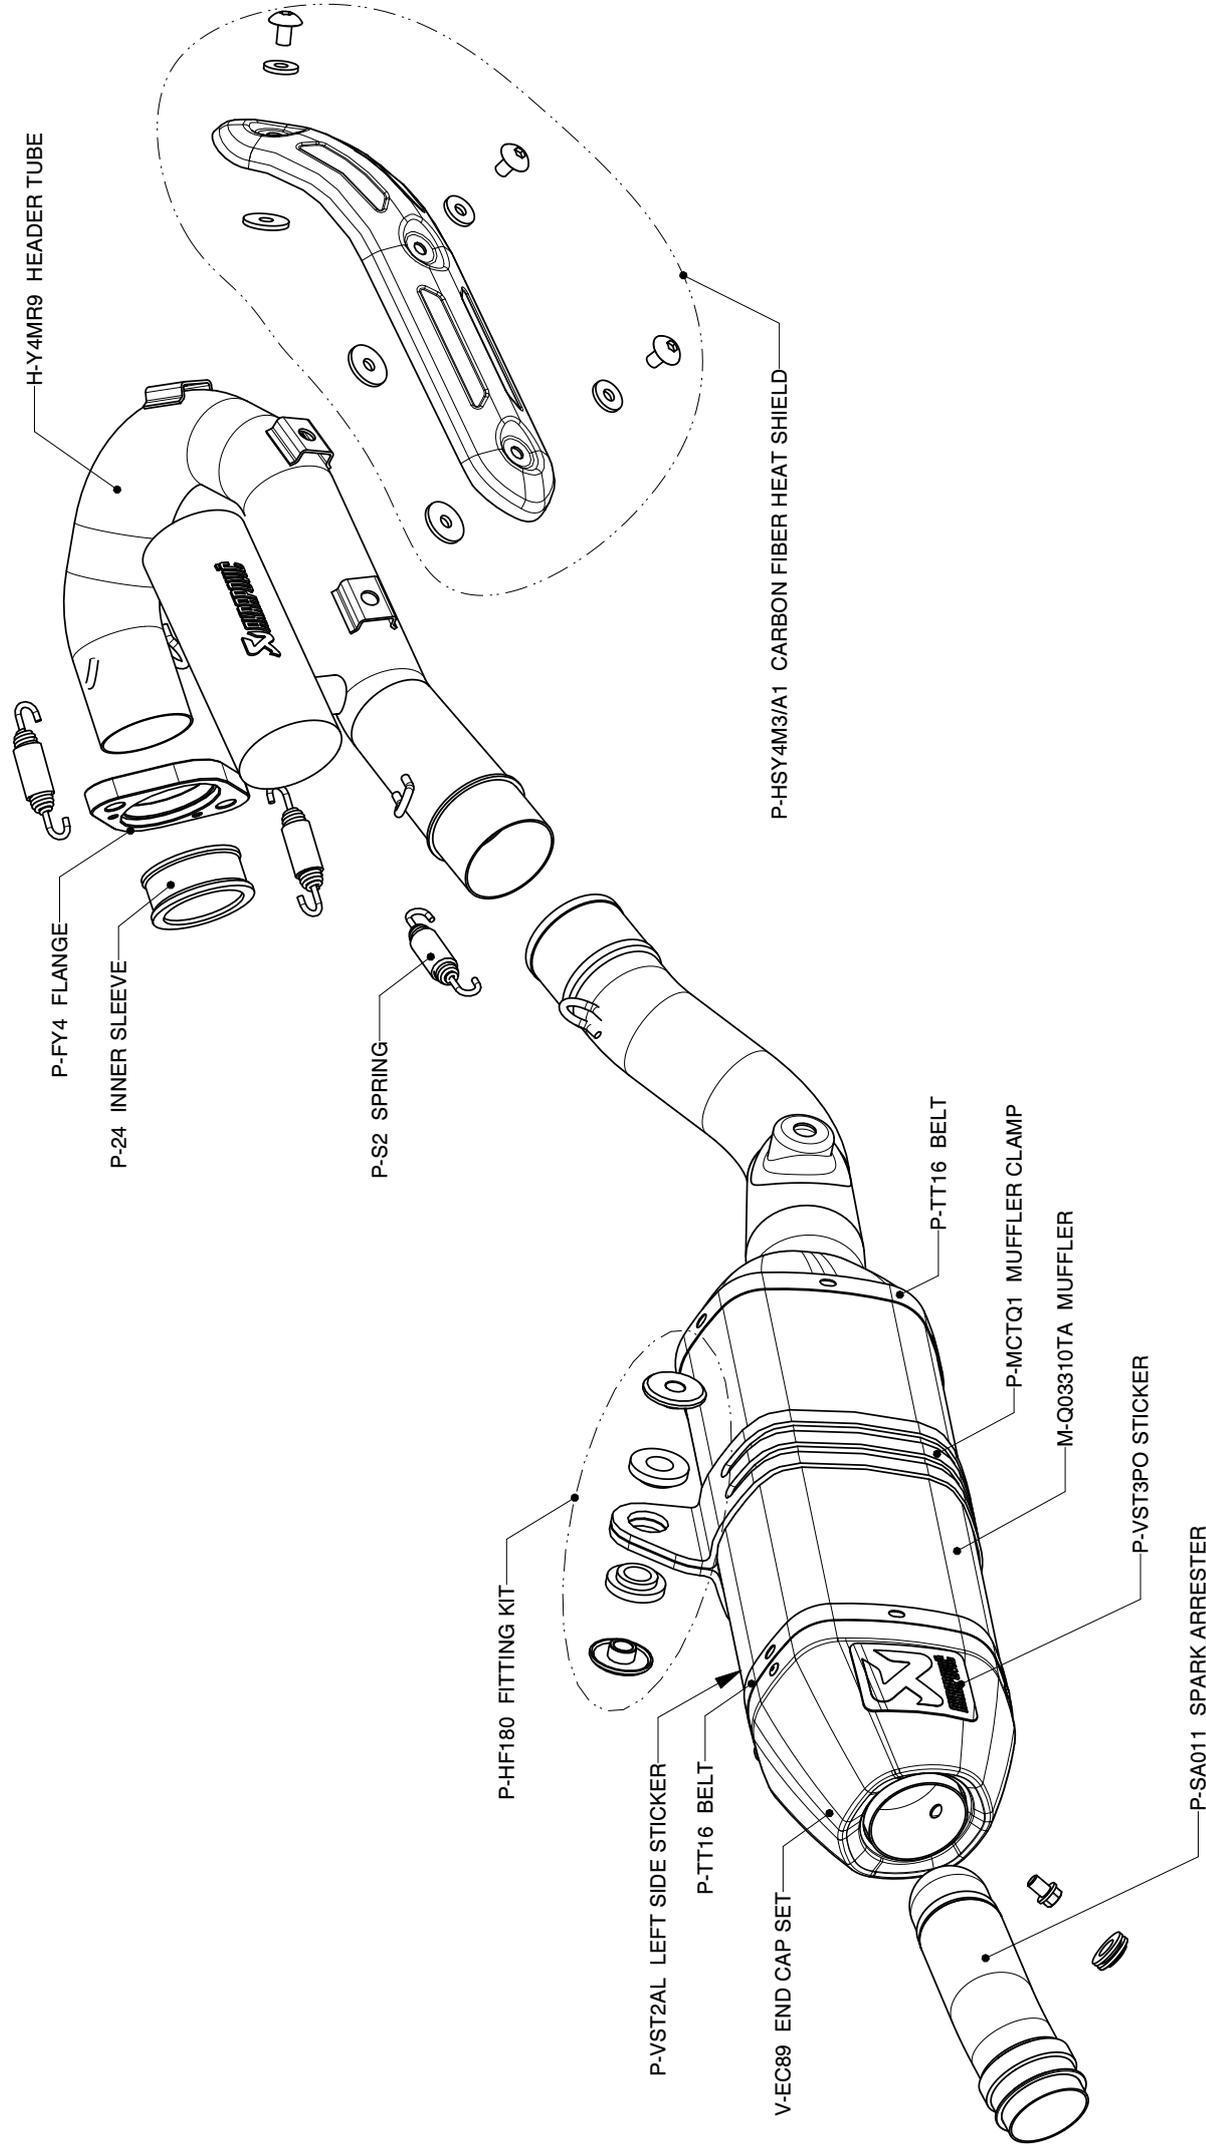

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36/1


YAMAHA YZ 450F, Complete exhaust system / EVOLUTION LINE

Product code: S-Y4MET9-QT

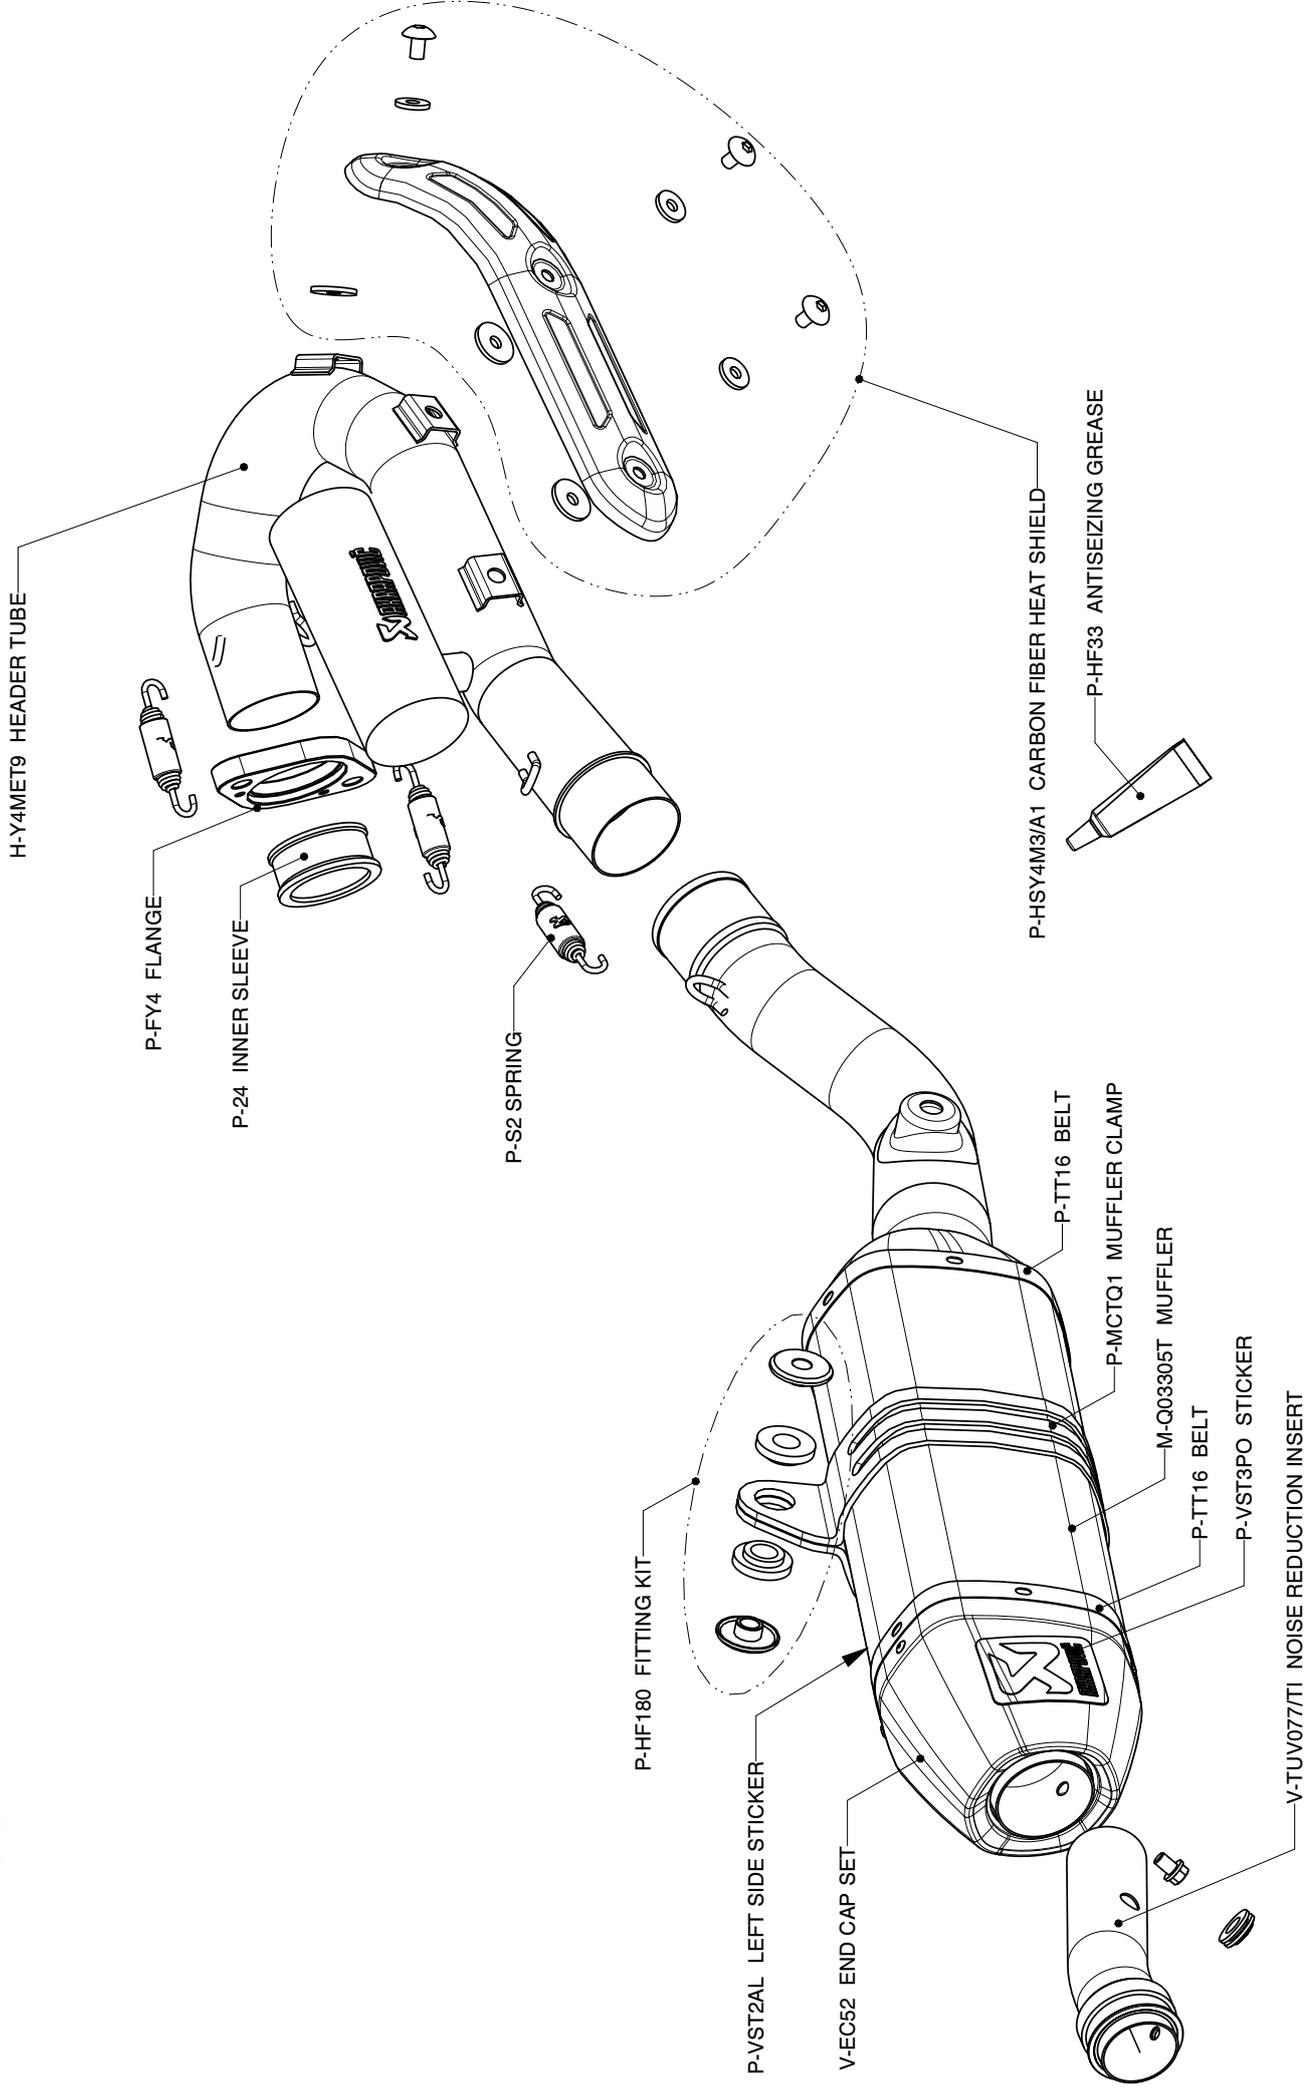

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36

YAMAHA YZ 450F, Complete exhaust system / EVOLUTION LINE (with Spark arrester)
Product code: S-Y4MET9-QTA

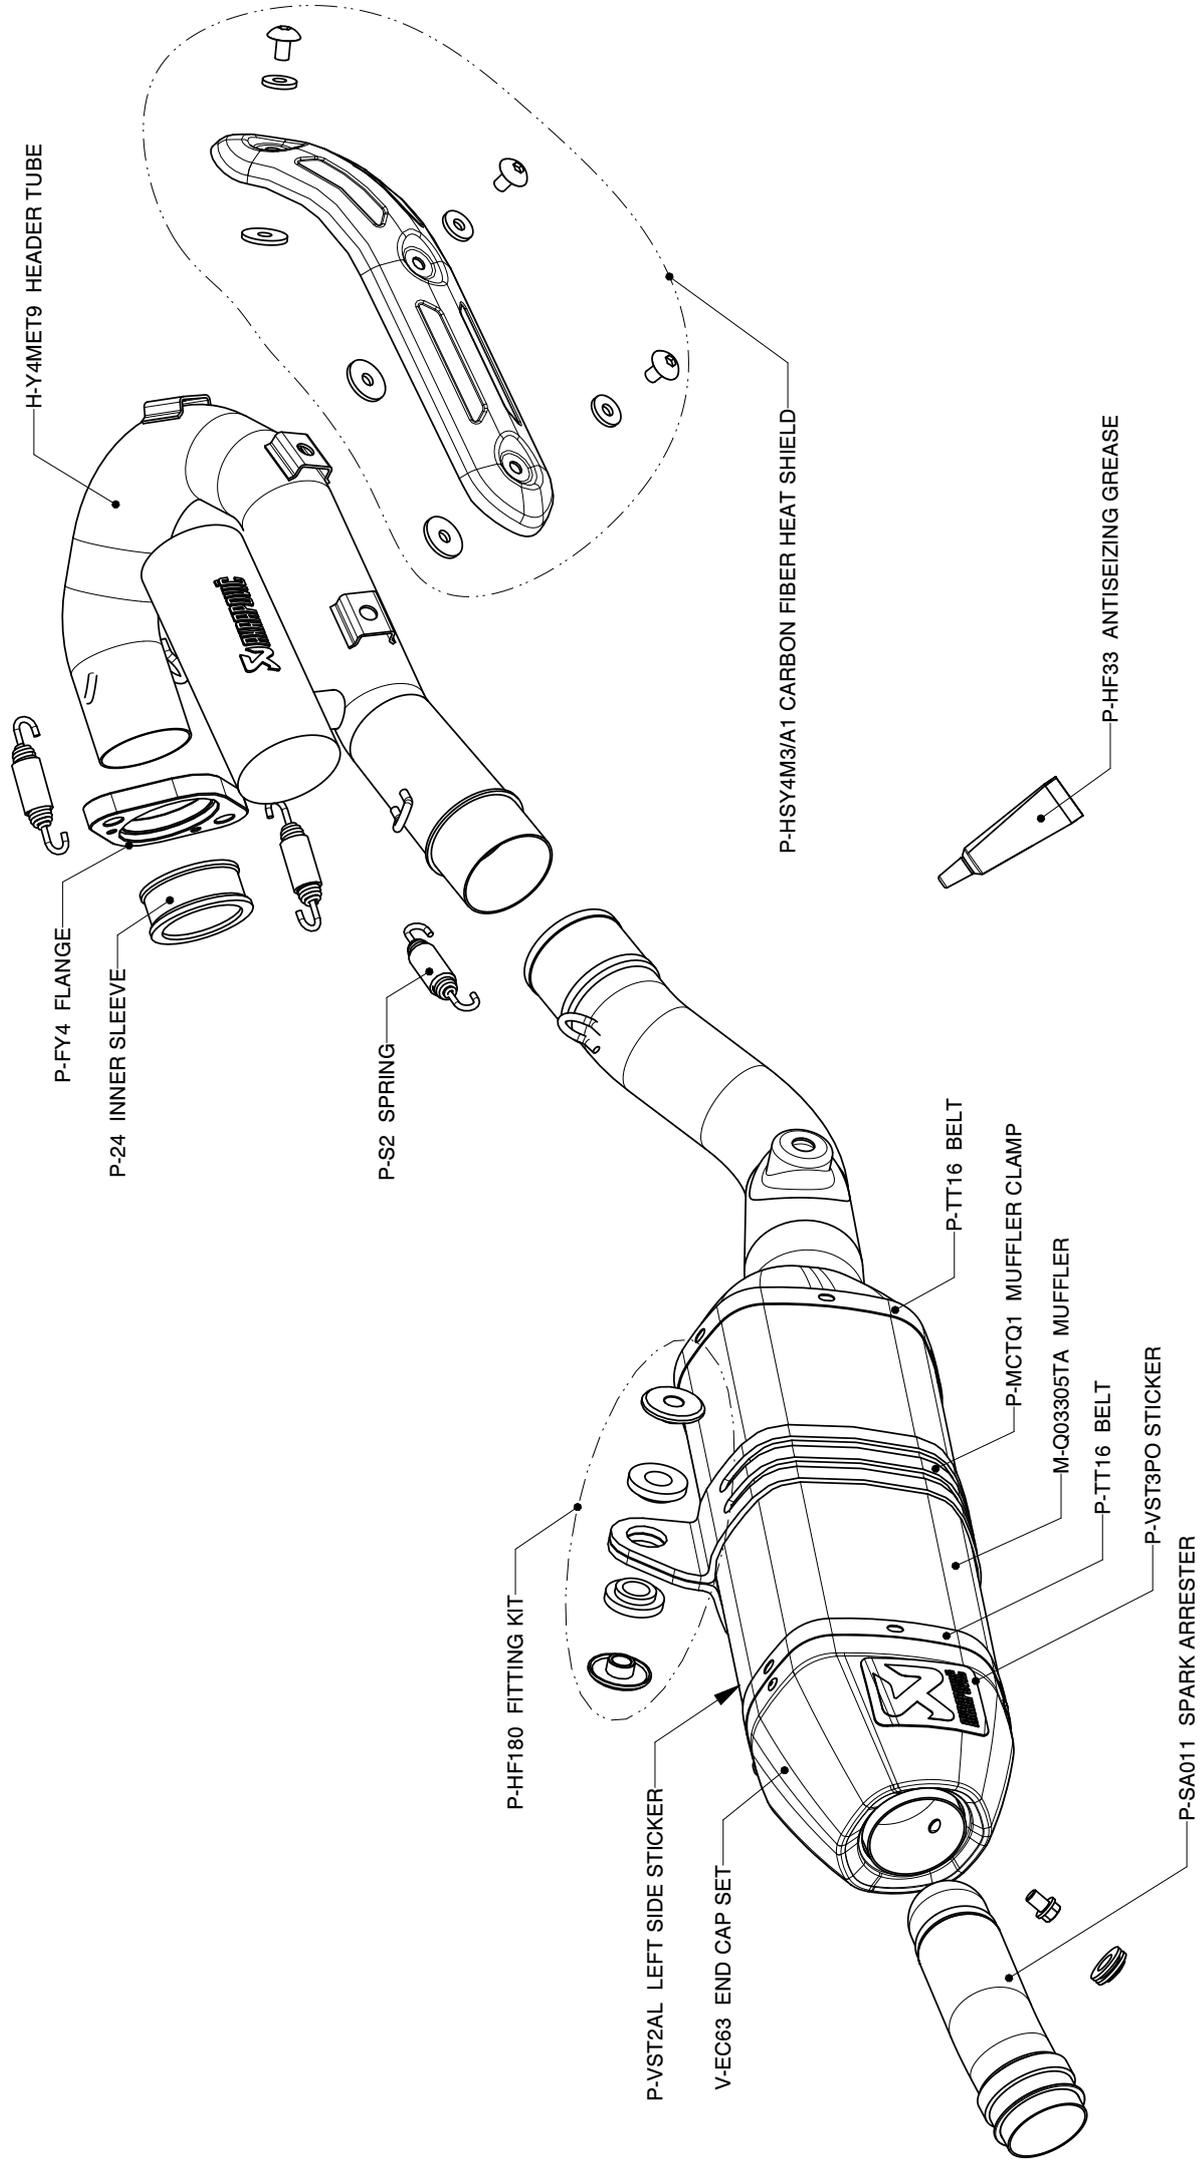

MUFFLER REPAIR KITS	
REPACK	P-RPCK22
SLEEVE	P-RKS92QT36